

NCARB

PRACTICE EXAM

ARCHITECT REGISTRATION EXAMINATION® 5.0

Programming and Analysis division



For use by supervisors and mentors.

Licensure candidates should access the free practice exams through their NCARB Record.

The Architect Registration Examination (ARE) 5.0 Practice Exams (“Materials”) are made available by the National Council of Architectural Registration Boards (“NCARB”) in accordance with the following terms and conditions (“Agreement”).

- LICENSE GRANT.** Conditioned on continued compliance with this Agreement, NCARB provides each individual person (identified herein as “you” or with “your), and whether an individual person or an individual person using pursuant to a license to an individual entity, with a revocable, personal, limited, non-exclusive, non-transferable, and non-sublicensable license to use the Materials solely for educational purposes in connection with (assisted) study and preparation for the Architect Registration Examination® (“ARE®”). This license permits you to create printouts or output from the Materials and discuss these works in public or private settings but only in accordance with this Agreement.
- LICENSE GRANT RESTRICTIONS.** The Materials are not intended to contain any questions currently in use in the ARE®. Consequently, no rights are granted under this Agreement to any questions or materials currently in use in the ARE®. All use is limited to the Materials (in the form and format) as made available by NCARB. Except as provided above, you may not modify, alter, recompile, reassemble, translate, create derivative work(s) of, distribute, publish, license, sub-license, transfer, sell, rent, timeshare, outsource, provide on a service bureau basis, lease, grant a security interest in, assign or transfer any right(s) in, or otherwise use in any manner not expressly permitted herein the Materials or any part thereof. In addition, you may not remove or alter any proprietary notice on the Materials or use any portion of the Materials independently from the Materials as a whole or for purposes other than as expressly permitted herein. All rights not expressly granted to you herein are hereby reserved to NCARB.
- USER OBLIGATIONS.** You represent that you are of the legal age to create a binding agreement with NCARB and agree to abide by all applicable local, state, national, and international laws and regulations with respect to your use of the Materials. You also agree to assume all responsibility concerning your use of the Materials.
- PROPRIETARY RIGHTS.** Any rights granted hereby are licensed and not sold or otherwise transferred or assigned to you or any third party. NCARB shall retain all ownership right, title, and interest in and to the Materials. Unless otherwise noted, the Materials are Copyright © 2026 The National Council of Architectural Registration Boards. All rights reserved. NCARB, ARE®, ARCHITECT REGISTRATION EXAMINATION, and all other names, logos, and icons identifying NCARB and its programs, products, and services are proprietary trademarks of NCARB, and any use of such marks, including, without limitation, as domain names, without the express written permission of NCARB is strictly prohibited. Unauthorized use of the Materials may violate intellectual property or other proprietary rights laws as well as other domestic and international laws.
- FEEDBACK.** NCARB welcomes your feedback and suggestions about how to improve the Materials. You agree that NCARB shall have the perpetual, royalty-free, and irrevocable right to use such feedback and suggestions in any manner it deems desirable without providing any consideration, attribution, or payment to you. You also represent and warrant that such feedback does not infringe or violate the intellectual property or proprietary rights of any third party (including, without limitation, patents, copyrights, or trademark rights) and that you have all rights necessary to convey to NCARB and enable NCARB to use such feedback.
- WARRANTY DISCLAIMER.** Use of the Materials is solely of your own volition and at your own risk. NCARB does not guarantee a passing score on the ARE® or similar standardized tests. NCARB ALSO MAKES NO REPRESENTATIONS OR WARRANTIES ABOUT THE SUITABILITY, COMPLETENESS, TIMELINESS, RELIABILITY, LEGALITY, OR ACCURACY OF THE MATERIALS FOR ANY PURPOSE. THE MATERIALS ARE PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, INCLUDING, WITHOUT LIMITATION, ALL IMPLIED WARRANTIES AND CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT AS WELL AS ANY WARRANTY RELATED TO THE USE, OR THE RESULTS OF THE USE, OF THE MATERIALS OR ANY DOCUMENTATION ASSOCIATED THEREWITH. NCARB may make modifications and/or changes to the materials at any time and for any reason.


7. **LIMITATION OF LIABILITY.** YOU AGREE THAT IN NO EVENT SHALL NCARB BE LIABLE FOR ANY INDIRECT, PUNITIVE, INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR IN ANY WAY CONNECTED WITH THE USE OF THE MATERIALS BY YOU OR ANYONE ELSE, WHETHER BASED IN CONTRACT, TORT, STRICT LIABILITY, OR OTHERWISE, EVEN IF YOU HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. WITHOUT LIMITATION OF THE FOREGOING, THE TOTAL LIABILITY OF NCARB FOR ANY REASON WHATSOEVER RELATED TO USE OF THE MATERIALS, INCLUDING FOR ANY CLAIMS RELATING TO THIS AGREEMENT, SHALL NOT EXCEED \$100 (USD).
8. **INDEMNITY.** You agree to defend, indemnify, and hold harmless NCARB and its affiliates, employees, licensors, agents, directors, officers, partners, representatives, shareholders, attorneys, predecessors, successors, and assigns from and against any and all claims, proceedings, damages, injuries, liabilities, losses, costs, and expenses (including reasonable attorneys' fees and litigation expenses) relating to or arising from your use of the Materials and any breach by you of this Agreement.
9. **GOVERNING LAW.** This Agreement has been made in and will be construed and enforced solely in accordance with the laws of the District of Columbia as applied to agreements entered into and completely performed in the District of Columbia. Any action to enforce this Agreement will be brought solely in the federal or local courts in the District of Columbia, U.S.A., and you and NCARB expressly agree to be subject to the jurisdiction of such courts. You also agree that because there is no adequate remedy at law, NCARB shall be entitled to equitable relief in the courts of the District of Columbia, including injunctive relief, in the event of any breach or threatened breach of the provisions of this Agreement, and you shall not oppose the granting of such relief. Entitlement to equitable relief shall not be the exclusive remedy but shall be in addition to damages and all other remedies available to NCARB. If NCARB takes legal action to enforce this Agreement and is granted any material relief because of your breach, NCARB shall be entitled to reasonable attorneys' fees, expenses, and costs of litigation.
10. **TERM AND TERMINATION.** This Agreement and your right to use the Materials will take effect at the moment you install, download, access, or use the Materials, whichever occurs first, and is effective until terminated as set forth below. This Agreement will terminate automatically if you fail to comply with any of the terms and conditions described herein, including by exceeding the scope of the license. Termination or expiration of this Agreement will be effective without notice. You may also terminate at any time by ceasing to use the Materials, but all applicable provisions of this Agreement will survive termination, as outlined below. Upon termination or expiration, any right to use the Materials will immediately cease and you must return, destroy, or delete from your system all copies of the Materials (and any associated materials) in your possession. The provisions concerning NCARB's proprietary rights, indemnity, disclaimers of warranty and liability, termination, and governing law, however, will survive the termination or expiration of this Agreement for any reason.
11. **MISCELLANEOUS.** Failure to insist on strict performance of any of the terms and conditions of this Agreement will not operate as a waiver of that or any subsequent default or failure of performance. A printed version of this Agreement and of any related notice given in electronic form shall be admissible in judicial or administrative proceedings based upon or relating to this Agreement to the same extent and subject to the same conditions as other business documents and records originally generated and maintained in printed form. No joint venture, partnership, employment, alliance, or agency relationship exists between you and NCARB as result of this Agreement or your utilization of the Materials. Moreover, you may not bind NCARB in any way or otherwise make any representations or statements for or on behalf of NCARB without NCARB's separate, express, and written permission. This Agreement represents the entire agreement between you and NCARB with respect to use of the Materials, and it supersedes all prior or contemporaneous communications and proposals, whether electronic, oral, or written, between you and NCARB with respect to the Materials. This Agreement may not be assigned or transferred by you without the prior express written consent of NCARB.

NCARB released this PDF version of the ARE Programming and Analysis division practice exam to help supervisors and mentors understand the content that exists across this division. If you are a supervisor or mentor, please use this to guide your engagements with the licensure candidates you are helping.

If you are a licensure candidate, please access the free practice exam through your NCARB Record rather than referring to this PDF version.

Note: for case study questions in this practice exam, the case study resources are not reproduced as part of this PDF for copyright and other reasons. Each case study question does identify which case study resources should be used to properly answer the question. Any licensure candidate can access the practice exam at no cost through their NCARB Record and show their supervisor/mentor the available case study resources.

Question 1

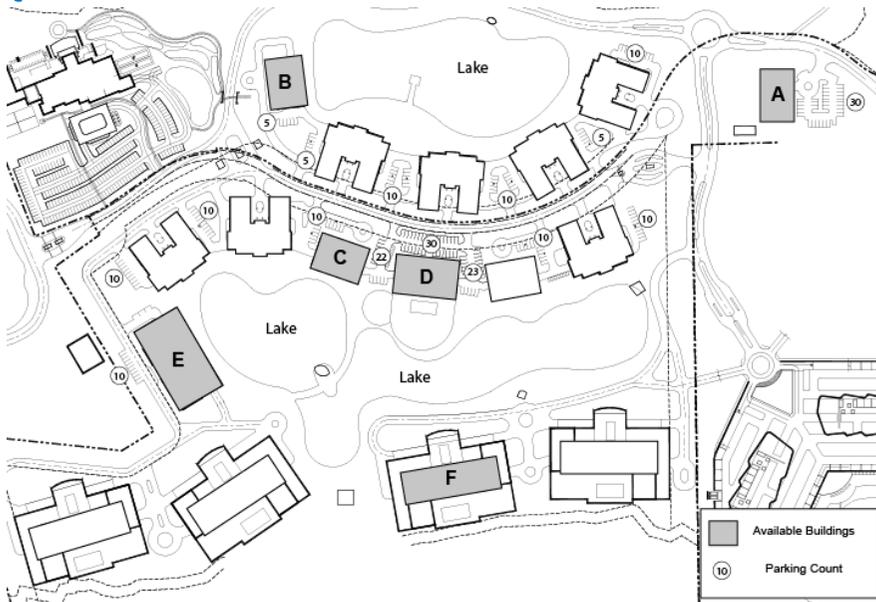

Refer to the exhibit.

A local hospital wants to open a rehabilitation center in a new, multi-building retirement community. The following is required for the rehabilitation center:

- Must be able to view a lake.
- Must have a minimum of 10 directly adjacent dedicated parking spaces.

Which buildings are appropriate to host the rehabilitation center? **Check the three that apply.**

- A. Building A
- B. Building B
- C. Building C
- D. Building D
- E. Building E
- F. Building F

Correct answer: CDE

CORRECT RESPONSES

Building C

Building C has a view of a lake and has enough (32) parking spaces.

Building D

Building D has a view of a lake and has enough (75) parking spaces.

Building E

Building E has a view of a lake and has enough (10) parking spaces.


Section: Building Analysis & Programming

Question 2

An existing church wants to add parking, but they do not want to add the parking in front of the Main Entry. The church also wants the most cost-effective location for the additional parking.

Click on the area of the site plan that provides the most economical location for an additional 50% more parking.

Correct answer:

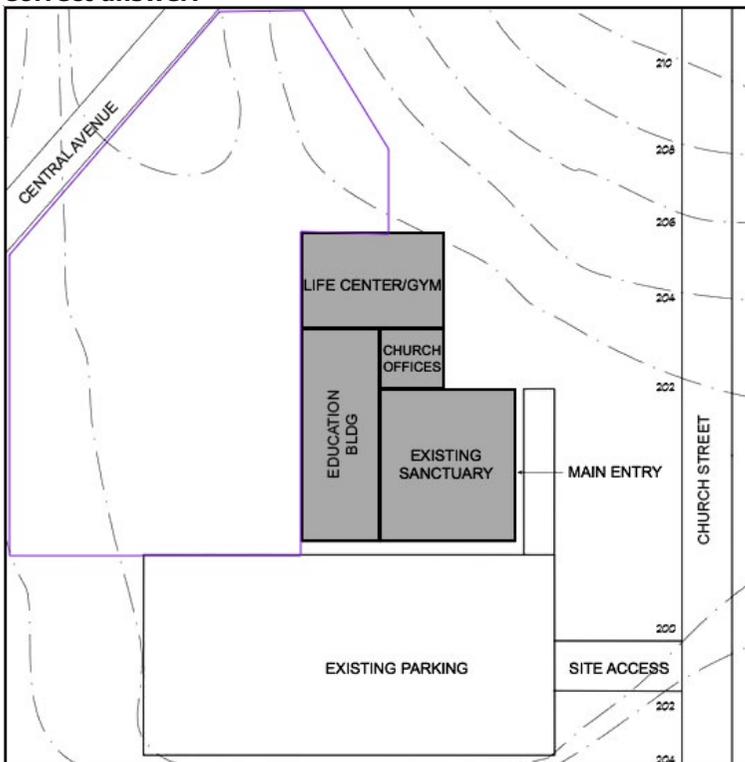

CORRECT RESPONSE

The area bounded by the church, Central Ave., the edge of the property, and the Existing Parking

This is a level area, which won't require the high cost of regrading, that is not located in front of the Main Entry of the Existing Sanctuary.

Section: Site Analysis & Programming

Question 3

Excerpts from 2010 ADA Standards for Accessible Design

604.8 Toilet Compartments. Wheelchair accessible toilet compartments shall meet the requirements of 604.8.1 and 604.8.3. Compartments containing more than one plumbing fixture shall comply with 603. Antibulky accessible compartments shall comply with 604.8.2 and 604.8.3.

604.8.1 Wheelchair Accessible Compartments. Wheelchair accessible compartments shall comply with 604.8.1.

604.8.1.1 Size. Wheelchair accessible compartments shall be 60 inches (1525 mm) wide minimum measured perpendicular to the side wall, and 56 inches (1420 mm) deep minimum for wall hung water closets and 59 inches (1500 mm) deep minimum for floor mounted water closets measured perpendicular to the rear wall. Wheelchair accessible compartments for children's use shall be 60 inches (1525 mm) wide minimum measured perpendicular to the side wall, and 59 inches (1500 mm) deep minimum for wall hung and floor mounted water closets measured perpendicular to the rear wall.





Figure 604.8.1.1
Size of Wheelchair Accessible Toilet Compartment

Excerpts from 521 CMR - Architectural Access Board (Authority Having Jurisdiction)

30.6 TOILET STALLS

If toilet stalls are provided, then at least one shall be a standard accessible toilet stall. Where six or more stalls are provided in a toilet room, at least one alternate accessible toilet stall (See Fig. 30c) shall be provided in addition to the standard accessible toilet stall. Accessible toilet stalls shall be on an accessible route.

30.6.1 Standard Accessible Toilet Stall: Standard accessible toilet stalls shall be at least 60 inches (60" = 1524mm) wide and 72 inches (72" = 1829mm) deep. See Fig. 30a and 30b. Arrangements shown for standard accessible toilet stalls may be reversed to allow either a left- or right-hand approach. Water closets in accessible stalls shall be located on the 60 inch (60" = 1524mm) wall and shall comply with 521 CMR 30.7, Water closets.



Accessible Toilet Stall (Left Approach)
Figure 30a

Refer to the exhibit.

An architect is working on a project located in the northeastern United States. Part of the project involves renovating the existing public restrooms to have four toilet stalls with wall hung water closets. At least one of the provided toilet stalls will be a standard accessible toilet stall.

According to the ADA and Architectural Access Board regulations, what is the minimum size of a standard accessible toilet stall for this project?

- A. At least 60 inches wide and 72 inches deep.
- B. At least 60 inches wide and 59 inches deep.
- C. At least 60 inches wide and 56 inches deep.

Correct answer: A

CORRECT RESPONSE

At least 60 inches wide and 72 inches deep.

The AHJ has its own Architectural Access Board regulations that are more stringent than the 2010 ADA Standards for Accessible Design regarding wheelchair accessible toilets stalls. The most stringent regulations need to be followed.

Section: Codes & Regulations

Question 4

A healthcare system wants to open a new clinic at a new location. They want the design of this new clinic to become a standard design that will be used at all future locations.

Click on the name of the meeting in the schedule to indicate when the healthcare system should inform the architect of the number of Exam/Treatment Spaces that will be needed in the new design.

Your answer: incorrect (not shown here)

Correct answer:

MONTH	MARCH	APRIL	MAY	JUNE	JULY	AUGUST	SEPTEMBER	OCTOBER	NOVEMBER
WEEK									
SCHMATIC DESIGN		[Schematic Design Period]							
Kick Off Meeting / Introductions		◆							
Initial Program / Concept / Visioning Meeting		◆							
SD Program & Plan Review Meeting		◆							
SD Plan Review Meeting 2			◆						
SD Plan Review Meeting 3			◆						
Issue SD Narrative / SD Floor Plans			◆						
SD Sign Off			◆						
DESIGN DEVELOPMENT				[Design Development Period]					
Design Development Meeting 1 (Exam / Treatment Spaces)				◆					
Design Development Meeting 2 (Office / Conference Spaces)				◆					
Design Development Meeting 3 (Entry / Lobby / Registration / Waiting)				◆					
Design Development Meeting 4 (Dental Area)				◆					
Design Development Meeting 5 (Finishes / Artwork / Signage)				◆					
Design Development Meeting 6 (Engineering)				◆					
Issue DD Documents						◆			
DD Sign Off						◆			

CORRECT RESPONSE

Kick Off Meeting/Introductions or Initial Program/Concept/Vision Meeting

Because this is a site adapt program, the number of exam rooms that will be needed would be discussed at either the Kick Off Meeting or the Initial Program meeting.

Section: Building Analysis & Programming

Question 5

WATERFRONT FRAMEWORK PLAN

Target	PLANNING ISSUES	GOALS
1 A Clean and Active River	Environmental Healing <ol style="list-style-type: none">1. Improving water quality.2. Eliminating sources of pollution.3. Restoring natural systems.4. Completing landscape networks and continuity.5. Defining various park boundaries.	<ul style="list-style-type: none">• Provide a river suitable for swimming.• Restore riparian function in the watershed in both urban and natural environments.• Implement "green" guidelines and standards to require sustainable development.• Increase all types of maritime activity.• Enhance environmental education on the river's watershed.
2 Breaking Down Barriers and Gaining Access	Enhancing Movement and Connections <ol style="list-style-type: none">1. Getting to the river.2. Moving along the river.3. Crossing the river.4. Using the river for commuting.5. Minimizing/eliminating barriers.	<ul style="list-style-type: none">• Provide continuous pedestrian and bicycle access along the entire waterfront.• Aggressively promote a modal shift to public transit.• Create great urban boulevards with mixed uses, landscaping, and great civic spaces.• Redesign bridges across the river in the tradition of great civic architecture.• Redesign highways and freeways to become less of a barrier between neighborhoods and waterfront parks.• Reconnect the city street grid to waterfront parks.
3 A Great Riverfront Park System	Enjoying the River <ol style="list-style-type: none">1. Maritime activities and boating.2. Active recreational and sports facilities.3. Special/memorable places.4. Special view-corridors and vistas.5. Great public and open spaces.6. Completing/enhancing promenades and trails.	<ul style="list-style-type: none">• Improve circulation to and between waterfront open spaces in order to create an interconnected park system.• Enhance underutilized parkland along the river to become important public amenities.• Ensure continuous access along the waterfront for pedestrians and bicyclists.• Increase recreational opportunities along the waterfront parks system.• Create distinct park destinations at the neighborhood, regional and national scales.

Refer to the exhibit.

A developer hires an architect to renovate a waterfront warehouse into a new apartment building. All improvements to waterfront property must serve the goals outlined in the Waterfront Framework Plan.

Which design strategies should the architect consider? **Check the two that apply.**

- A. Add a bike storage room on the first floor.
- B. Provide an indoor gym with a waterfront view.
- C. Design an outdoor theater along the waterfront trail.
- D. Remove the mangrove forest to build a pier for a water taxi stop.
- E. Renovate the existing pier as a private club for apartment residents.
- F. Demolish the historical lighthouse to expand the waterfront public park.

Correct answer: AC

CORRECT RESPONSES

Add a bike storage room on the first floor.

Adding long-term bike storage in the garage will be helpful to the Framework Plan goal of providing bicycle access to the waterfront.

Design an outdoor theater along the waterfront trail.

Designing an outdoor theater can reinforce the waterfront connection, increase recreational opportunities, and provide a civic space in the waterfront area.

Section: Codes & Regulations

Question 6

Which of the following is the most restrictive when determining a building's maximum allowable floor-to-area ratio?

- A. Construction type
- B. Occupancy group
- C. Zoning ordinances

Correct answer: C

CORRECT RESPONSE

Zoning ordinances

Zoning regulations limit the setbacks, building height, and allowable floor-to-area ratio.

Section: Codes & Regulations

Question 7

A client asks an architect to perform a review of existing site conditions to determine if a ground source heat exchange system is possible at the site.

Which one of the following should the architect review?

- A. Geotechnical reports
- B. Seasonal sun diagrams
- C. Stormwater runoff records


Correct answer: A

CORRECT RESPONSE
Geotechnical reports

Geotechnical reports for water table conditions are used to determine if geothermal opportunities, which a ground source heat exchange system would take advantage of, are present at the site.

Section: Environmental & Contextual Conditions

Question 8

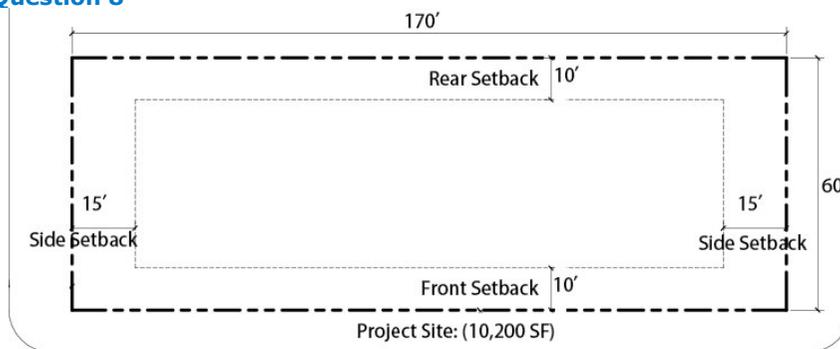

		Allowable Number of Stories							
		Type I		Type II		Type III		Type V	
	Sprinkler Type	A	B	A	B	A	B	A	B
A-1	NS	Unlimited	5	3	2	3	2	2	1
	S	Unlimited	6	4	3	4	3	3	2
R-2	NS	Unlimited	11	4	4	4	4	3	2
	S	Unlimited	12	5	5	5	5	4	3

Note:
 NS: Building not equipped throughout with an automatic sprinkler system
 S: Building equipped throughout with an automatic sprinkler system

Refer to the exhibit.

A developer hires an architect to design a sprinklered apartment building with occupancy R-2 for a vacant parcel of land in a high-density neighborhood. The developer wants the apartment building to maximize the number of floors while building out the entire site allowed by zoning. The land has the following zoning requirements:

- The maximum FAR is 3.5
- Building height limit is 85'

Based on the local codes shown in the exhibit, which construction types should the architect consider using? **Check the three that apply.**

- A. Type I-A
- B. Type II-A
- C. Type III-A
- D. Type V-A
- E. Type I-A podium with Type III-A above
- F. Type I-A podium with Type V-A above

Correct answer: AEF

CORRECT RESPONSES

Type I-A

The maximum number of stories the client can build is six; Type I-A has unlimited stories.

Type I-A podium with Type III-A above

One story of Type I-A podium plus five stories of Type III-A meets the six-story allowance.

Type I-A podium with Type V-A above


Two stories of Type I-A podium plus four stories of Type V-A meets the six-story allowance.

CALCULATIONS

1. For the maximum gross square footage: $10,200 \text{ sf (site area)} \times 3.5 \text{ (FAR)} = 35,700 \text{ sf}$
2. For the length of the building footprint: $60' \text{ (length of the site)} - 10' \text{ (front setback)} - 10' \text{ (rear setback)} = 40'$
3. For the width of the building footprint: $170' \text{ (width of the site)} - 15' \text{ (side setback)} - 15' \text{ (side setback)} = 140'$
4. For the maximum building footprint = $40' \times 140' = 5,600 \text{ sf}$
5. For the number of floors: $35,700 \text{ sf} / 5,600 \text{ sf} = 6.375 \text{ floors}$, rounded to 6 floors

Section: Building Analysis & Programming

Question 9

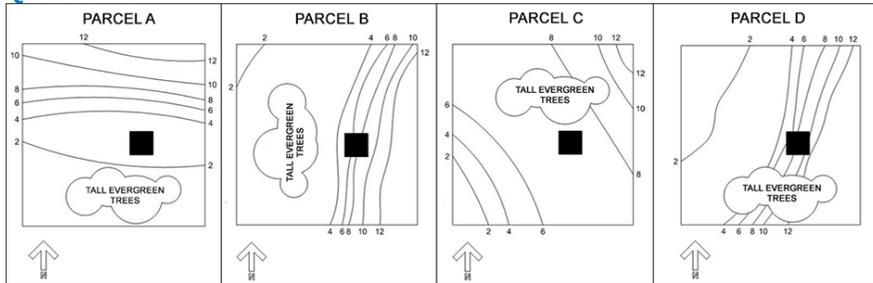

Refer to the exhibit.

An owner hires an architect to recommend a parcel of land for the construction of a solar residence. The owner wants the most cost-effective option.

Which parcel should the architect recommend?

- A. Parcel A
- B. Parcel B
- C. Parcel C
- D. Parcel D

Correct answer: C

CORRECT RESPONSE

Parcel C

The tall evergreen trees are located where they don't affect solar exposure, and the parcel is not on a steep slope, meaning that construction costs will be kept to a minimum.

Section: Environmental & Contextual Conditions

Question 10

A hospital located on a dense urban site with no vacant land has hired an architect to develop a new pharmacy through either renovation or relocation. The existing pharmacy must remain operational throughout the renovation or relocation, and construction cost and duration must be minimized. There is a vacant former medical records space down the hall from the existing pharmacy.

Which phasing option should the architect recommend?

- A. Relocate the pharmacy to a temporary trailer and renovate the existing pharmacy.
- B. Renovate the existing pharmacy in multiple phases so that part of the pharmacy can always remain operational.
- C. Build a temporary pharmacy in another location to be used only while the existing pharmacy is under renovation.
- D. Build the new pharmacy in the existing medical records space and abandon the existing pharmacy at completion of construction.

Correct answer: D

CORRECT RESPONSE

Build the new pharmacy in the existing medical records space and abandon the existing pharmacy at completion of construction.

The architect should recommend building the pharmacy elsewhere because it will minimize construction phases and maximize available resources.

Section: Building Analysis & Programming

Question 11

An architect is designing a new suburban office building for a client. The client has the following requirements for their new facility:

- Separate employee and visitor parking.
- Ease of wayfinding for visitors to the facility.
- Control over all access points to the building.
- Employee gym and locker rooms to promote staff well-being.
- Frequent deliveries should not interfere with normal business operations.

Which of the following options related to building access should be considered by the design team? **Check the three that apply.**

- A. Visibility of main entry
- B. Combined service entry and main entry
- C. New traffic light at main entry to campus
- D. Separate service entry with loading dock
- E. Shared parking area for all building users
- F. Dedicated staff entry adjacent to employee gym

Correct answer: ADF

CORRECT RESPONSES

Visibility of main entry

The main entry serves as a wayfinding tool, and, because the client requires ease of wayfinding, the visibility of that main entry will be an important consideration of the design team.

Separate service entry with loading dock

A separate service entry with loading dock will prevent frequent deliveries from interfering with business hours, which is a requirement of the client.

Dedicated staff entry adjacent to employee gym

A dedicated staff entry will facilitate separate employee parking. Also, locating the entry near the employee gym provides a convenient amenity to staff.

Section: Building Analysis & Programming

Question 12

County Demographic Report

Households Estimate	108,000	
Average Household Size	2.18	
Average Family Size	2.99	


Household Size		
1-Person	40,872	39%
2-Person	34,483	33%
3-Person	13,037	12%
4-Person	11,438	11%
5+ Persons	4,886	5%
Total	104,716	100%

Household Type		
Family-Households	48,455	46%
Non-Family Households	56,261	54%
Total	104,716	100%

Population Estimate	228,400	
Daytime Population Estimate	311,800	

Age Distribution		
Under 5	13,740	6.0%
5-19	30,790	13.5%
20-24	15,590	6.8%
25-34	54,960	24.1%
35-44	38,020	16.6%
45-54	28,590	12.5%
55-64	22,470	9.8%
65-84	21,280	9.3%
85 and over	2,960	1.3%
Median Age	34.5 years	

Unemployment Rate and Civilian Labor Force

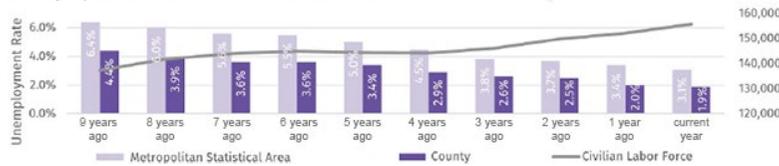

Refer to the exhibit.

A developer wants to renovate a warehouse into a mixed-use building with public space on the first floor and residential units above.

Which program is most appropriate for the building?

- A. Two-bedroom condo units with an unemployment assistance center below.
- B. One-bedroom senior living community with a nursing home below.
- C. Four-bedroom luxury condo units with a private club below.
- D. One-bedroom apartments with a commercial gym below.

Correct answer: D

CORRECT RESPONSE

One-bedroom apartments with a commercial gym below.

According to the demographic report, 1- to 2-person households comprise over 70% of the community and the median resident age is 34.5, which makes one-bedroom units with a commercial gym the most appropriate use for the building.

Section: Building Analysis & Programming

Question 13

503.1.4 Occupied roofs. A roof level or portion thereof shall be permitted to be used as an occupied roof provided the occupancy of the roof is an occupancy that is permitted by Table 504.4 for the *story* immediately below the roof. The area of the occupied roofs shall not be included in the *building area* as regulated by Section 506. An occupied roof shall not be included in the *building height* or number of *stories* as regulated by Section 504, provided that the *penthouses* and other enclosed *rooftop structures* comply with Section 1511.

Exceptions:

1. The occupancy located on an occupied roof shall not be limited to the occupancies allowed on the *story* immediately below the roof where the building is equipped throughout with an *automatic sprinkler system* in accordance with Section 903.3.1.1 or 903.3.1.2 and occupant notification in accordance with Sections 907.5.2.1 and 907.5.2.3 is provided in the area of the occupied roof. *Emergency voice/ alarm communication system* notification per Section 907.5.2.2 shall also be provided in the area of the occupied roof where such system is required elsewhere in the building.

2. Assembly occupancies shall be permitted on roofs of open parking spaces of Type I or Type II construction, in accordance with the exception to Section 903.2.1.6.

503.1.4.1 Enclosures over occupied roof areas. Elements or structures enclosing the occupied roof areas shall not extend more than 48 inches (1220 mm) above the surface of the occupied roof.

Exception: *Penthouses* constructed in accordance with Section 1511.2 and towers, domes, spires and cupolas constructed in accordance with Section 1511.5.

Refer to the exhibit.

The owner of an apartment building wants to add a rooftop patio. The building has four stories, a wood frame, an automatic fire sprinkler system, and an emergency voice/alarm communication system. The proposed patio would cover half of the roof and include a small penthouse with stair and elevator access. A structural engineer determines that the existing roof structure can support the new patio.

How should the architect bring the rooftop patio into code compliance?

- A. Add an emergency voice/alarm communication system to the rooftop patio.
- B. There is no code requirement for the rooftop patio.
- C. Limit rooftop patio occupancy to 20% of the floor below.

Correct answer: A


CORRECT RESPONSE

Add an emergency voice/ alarm communication system to the rooftop patio.

There is an exception to this limitation if the building is fully sprinklered and there is an occupant notification system throughout the building and on the roof.

Section: Building Analysis & Programming

Question 14

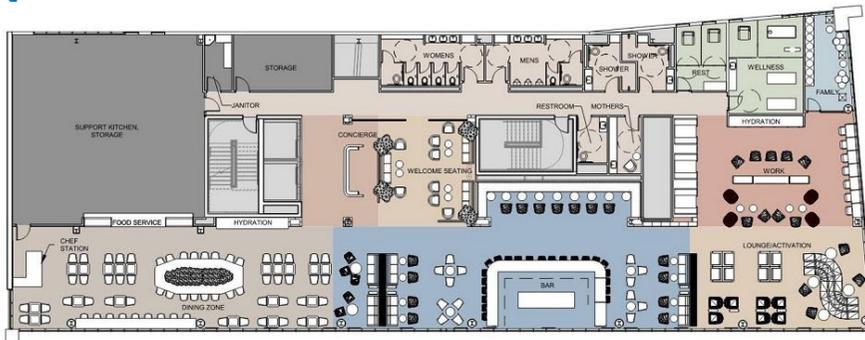

Refer to the exhibit.

An architect is working on an airline club at an airport in the northeast United States. The airport has strict acoustic criteria and wants to pursue LEED Gold certification.

Which consultants should the architect include on the project team? **Check the four that apply.**

- A. Public health consultant
- B. Sustainability consultant
- C. Food service consultant
- D. Aviation consultant
- E. Acoustic consultant
- F. Interior design consultant

Correct answer: BCEF

CORRECT RESPONSES

Sustainability consultant

A sustainability consultant will provide guidance for the project for LEED accreditation.

Food service consultant

A food service consultant will provide guidance on the food-related portion of the project, including for such spaces as Food Service, Kitchen Support, and Chef Station.

Acoustic consultant


An acoustic consultant will provide evaluation and advice on following the strict acoustic criteria demanded by the airport.

Interior design consultant

An interior design consultant will provide FF&E consulting.

Section: Site Analysis & Programming

Question 15

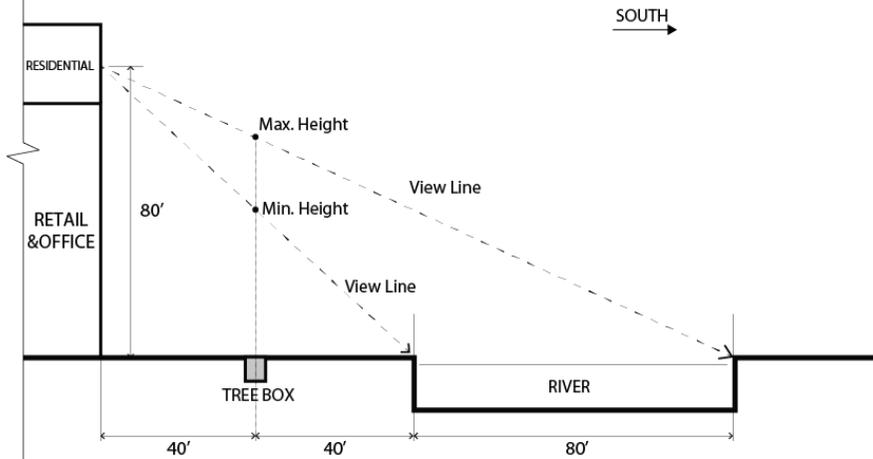

Refer to the exhibit.

A developer has asked an architect for tree type recommendations. The trees are to be planted in a tree box between the building and the river. The developer has the following requirements for the trees:

- Be as tall as possible without blocking the entirety of the residential water view.
- Block sunlight in the summer and allow sunlight in the winter.
- Be suitable for a moist soil type.

Click on the photo of the tree in the Site Plantings Materials List that is most appropriate for the tree box.

Correct answer:

Site Plantings Materials List						
Image	Name	Tree Type	Mature Height	Native Origin	Water Usage	Soil Type
	Jack Pine	Evergreen	65'	Northeast, Midwest	Low	Medium/Dry
	Red Oak	Deciduous	120'	Midwest, South, Southeast	Medium	Moist
	Sugar Maple	Deciduous	75'	Midwest, Southeast, South	Medium	Moist
	Big Cone Pine	Evergreen	80'	West, Northwest	Medium	Medium
	Box Elder	Deciduous	58'	Midwest, North	High	Moist
	Inkberry	Evergreen	8'	Southeast	High	Moist
	White Pine	Evergreen	40'	Northeast, Midwest, Northwest	Medium	Dry-Moist

CORRECT RESPONSE

Box Elder


The tree height is 58', which is below the 60' limit. It is the correct tree type, deciduous, which blocks sunlight in the summer and allows light in the winter. It is also suitable for a moist soil type.

CALCULATIONS

1. Maximum tree height: $80' \text{ (distance from ground to the viewing point of the building)} / 160' \text{ (distance from building to far bank of the river)} = H / 120 \text{ (distance from tree box to far bank of the river)}; H = 60'$
2. Viewing triangle is 80' high and 160' long, resulting in a 1:2 ratio of height to length.
3. $120' / 2 = 60'$ maximum tree height

Section: Environmental & Contextual Conditions

Question 16

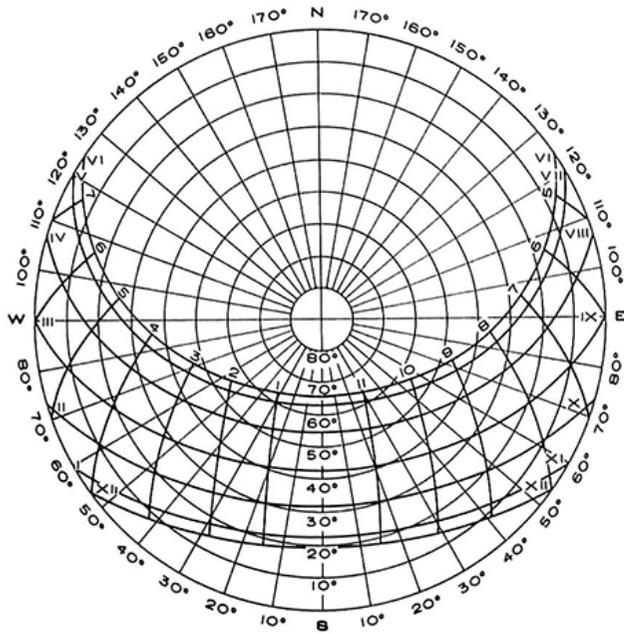

48°N LATITUDE

Refer to the exhibit.

A new recreation center is being proposed in the northern United States. The current design calls for the entire north wall of the gymnasium to have floor-to-ceiling glass. The owner is concerned about direct sunlight shining into the gymnasium in the mornings and evenings.

For which one of the following months will the potential for direct sunlight be the greatest concern?

- A. March
- B. May
- C. September

Correct answer: B

CORRECT RESPONSE

May

At this latitude, north facing windows will receive direct sunlight in the month of May in the mornings and evenings.

Section: Site Analysis & Programming

Question 17

A city acquires a six-acre property through eminent domain and hires an architect to design a new 20,000-square-foot aquatic center on the site. The site has the following characteristics:

- Previously used as a vehicle salvage yard.
- Easy access to a nearby interstate.
- Across the street from a city park and fire station.

Which of the following should the architect prioritize before beginning the design of the aquatic center?

- A. Monitoring the progress of the legal action filed by the previous owner over the seizure of the property.
- B. Performing environmental testing on the site to determine if groundwater or soil is contaminated.
- C. Planning the public drive access away from the existing fire station to avoid cross traffic with emergency vehicles.

Correct answer: B

CORRECT RESPONSE

Performing environmental testing on the site to determine if groundwater or soil is contaminated.

Vehicle salvage yards are often contaminated by waste oil, gas, and other vehicle fluids that have leaked into the soil over time. Environmental testing should be performed to determine the impact of the salvage yard's tenure at the site. Different types of mitigation are possible depending on the proposed use and will affect how the site needs to be designed.

Section: Environmental & Contextual Conditions

Question 18

An architect is planning to reuse an existing unprotected wood-frame building for a 400-seat church.

What should the primary code consideration be for this use?

- A. Acoustical separation
- B. Allowable floor area
- C. Column spacing

Correct answer: B


CORRECT RESPONSE

Allowable floor area

The allowable floor area is very limited in an unprotected wood frame building. This would impact the reuse potential of this construction type.

Section: Codes & Regulations

Question 19

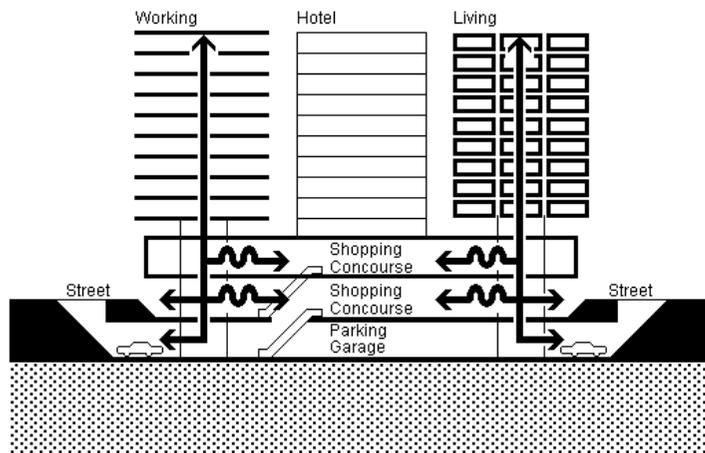

Refer to the exhibit.

Which one of the following types of developments is shown in the diagram?

- A. Converted use
- B. Institutional use
- C. Mixed use
- D. Single use

Correct answer: C

CORRECT RESPONSE

Mixed use

The building in the exhibit is mixed use, as it is shared by residential, hotel, retail, and office space.

Section: Building Analysis & Programming

Question 20

An owner is developing three retail stores on a fully hardscaped Brownfield site previously used as a dry-cleaning facility and a gas station. An underground gasoline storage tank was removed 20 years before, and soil samples taken during the tank removal confirmed the soil had been contaminated by the underground storage tank.

What type of contaminants are most likely to be found? **Check the three that apply.**

- A. Lead
- B. Ozone
- C. Fertilizer
- D. Pesticide
- E. Petroleum
- F. Volatile organic compounds

Correct answer: AEF

CORRECT RESPONSES

Lead

Lead is often found at Brownfield sites, especially if past uses include the storage or handling of fuel.

Petroleum

Petroleum, oil, and hydrocarbon compounds are often found at Brownfield sites, especially if past uses include the storage or handling of fuel.

Volatile organic compounds

Volatile organic compounds, or man-made chemicals, are often found at Brownfield sites, especially if past uses involve industrial or commercial solvents, degreasers, or dry cleaning products.

Section: Environmental & Contextual Conditions

Question 21

An owner has a small property that has a ten-foot-wide side yard, which includes a four-foot-wide utility easement that runs along one side of the yard. The owner has hired an architect to assist in locating a new 7' x 7' shed in the side yard.

How should the owner proceed with the construction of the shed?

- A. Construct the shed because they own the entire parcel.
- B. Request permission from the utility company before constructing the shed.
- C. Do not construct the shed because no structure can be placed in the easement.

Correct answer: B

CORRECT RESPONSE

Request permission from the utility company before constructing the shed.

The property owner must receive permission from the utility company before building on land designated as a utility easement.

Section: Codes & Regulations


Question 22

A client is buying land for a commercial building. Client requirements follow:

- The client is not willing to rezone.
- The site must be bordered by Kermit Street.
- The site should not be directly across from a historical battle field.
- The client wants to maximize indirect, natural light at the street-facing frontage.
- The combined area of the ground floor and the parking area must be greater than 24,000 square feet.

Click on the parcel in the site plan that meets the client's requirements.

Correct answer:

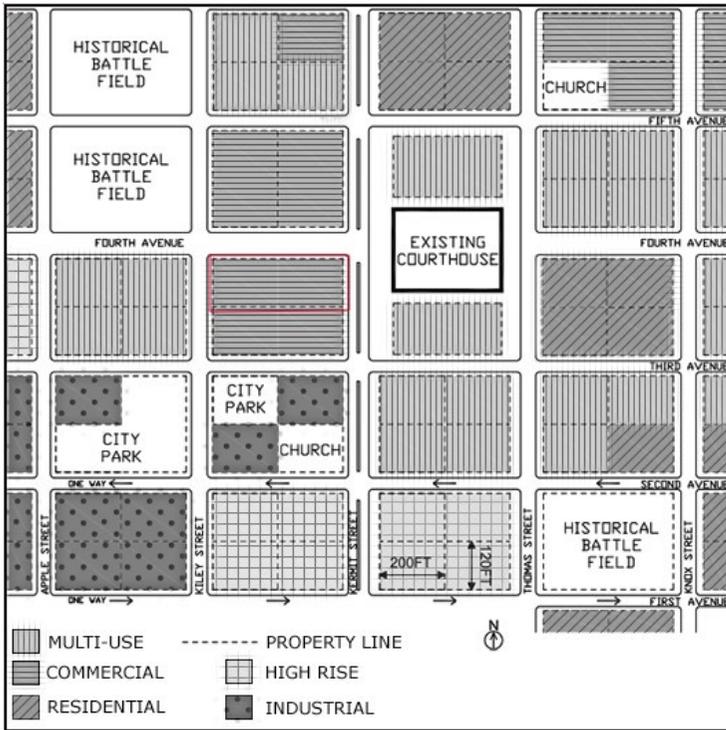

CORRECT RESPONSE

Commercial parcel bounded by Fourth Street to the north and Kermit Street to the east


This parcel is the correct size, is bordered by Kermit Street, and has a long northern street frontage for maximizing indirect light.

CALCULATIONS

1. Site area: 200 ft x 120 ft x 2 (number of lots) = 48,000 sf

Section: Site Analysis & Programming

Question 23

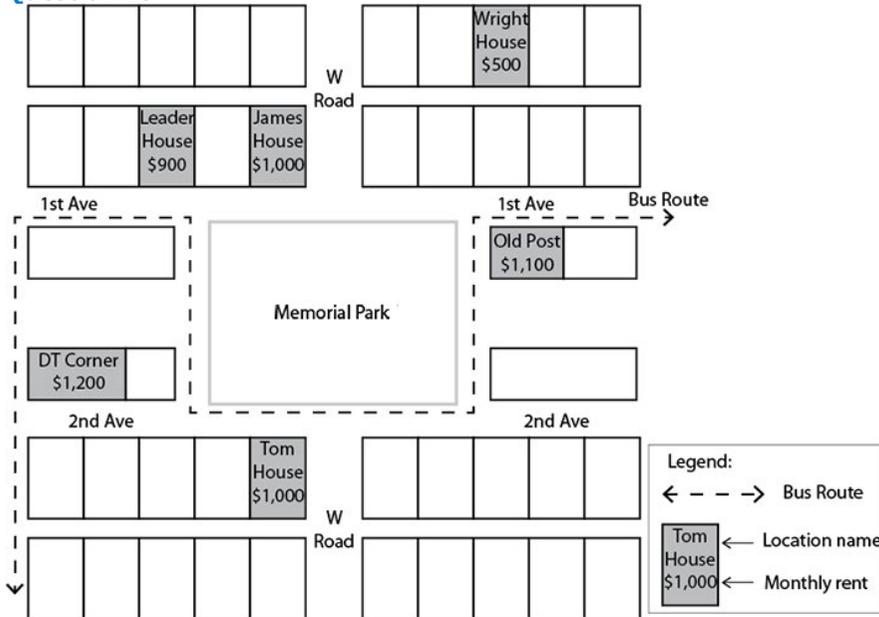

Refer to the exhibit.

A restaurant owner wants to open a new neighborhood restaurant. Their budget is \$17,000, which includes the first year of rent and a minimum of \$5,000 for renovations. They have the following requirements for the site:

- On a bus route
- On 1st Ave or 2nd Ave
- View of Memorial Park

Which locations for the restaurant meet the owner's requirements? **Check the two that apply.**

- A. Wright House
- B. Leader House
- C. James House
- D. Old Post
- E. DT Corner
- F. Tom House

Correct answer: BF

CORRECT RESPONSES

Leader House

The cost for rent at this location is acceptable ($\$900 < \$1,000$). The location is on a bus route, has a view of the park, and is adjacent to 1st Ave.

Tom House

The cost for rent at this location is acceptable ($\$1,000 = \$1,000$). The location is on a bus route, has a view of the park, and is adjacent to 2nd Ave.

CALCULATIONS

1. One year's rent: $\$17,000$ (budget) - $\$5,000$ (remodel cost) = $\$12,000$
2. Monthly rent: $\$12,000 / 12 = \$1,000$

Section: Environmental & Contextual Conditions

Question 24

A new development located near an active canal is in the assessment phase. The architect receives a soils report that indicates possible hydrostatic water problems where the foundation for a new building is to be placed. The developer asks the architect to suggest water mitigation strategies.

Which of the following should the architect suggest? **Check the three that apply.**

- A. Sump pumps near the areas where the footings will be constructed.
- B. Dampproofing membranes around elements in the ground.
- C. Aggregate base course or gravel fill below the slabs.
- D. Vapor barriers around the building perimeter.
- E. Pervious paving at all hardscape locations.
- F. Drainage boards around the building.

Correct answer: ACF

CORRECT RESPONSES

Sump pumps near the areas where the footings will be constructed.

The use of sump pumps, while not the most cost-effective way of mitigating hydrostatic pressure, can be a solution to remove water that impacts the building structure.

Aggregate base course or gravel fill below the slabs.


Gravel fill mitigates hydrostatic pressure by providing an air void near the foundations or slabs.

Drainage boards around the building.

The use of drainage boards around the building alleviates hydrostatic pressure by creating a void or path through which water can be directed.

Section: Site Analysis & Programming

Question 25

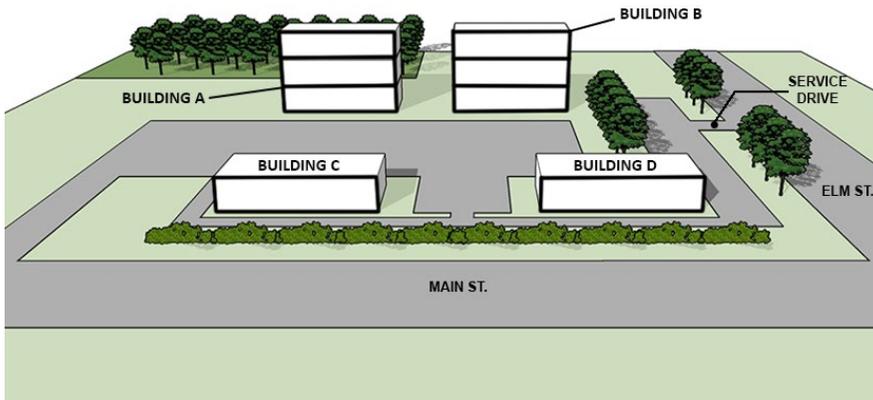

Refer to the exhibit.

An architect is designing a new mixed-use development with four buildings. The site is adjacent to a park, has a main parking area, and has a smaller parking lot with a service drive off of Elm Street. The investors make the following requests:

- Three floors of Apartments are required, and they should be located close to the wooded park behind the property.
- One level of Apartments should be on the ground floor.
- A Coffee Shop should be located where a drive-through can be provided.
- A Market should be located with direct access to the service drive.
- A Flower Shop should be close to the service drive.
- A Lawyer's Office and an Accountant's Office must each be located on the third floor of a building.
- The Lawyer's office should not be next to Elm Street or Main Street.
- All retail should be located on the ground floor.

Which functions are most appropriate for the spaces in Building B? **Check the three that apply.**

- A. Market
- B. Apartments
- C. Flower Shop
- D. Coffee Shop
- E. Lawyer's Office
- F. Accountant's Office

Correct answer: BCF

CORRECT RESPONSES

Accountant's Office

The Accountant's Office must be placed on the highest floor of a building. The Lawyer's office must be placed on the highest floor of Building A, the Market needs access to the service drive and must be placed in Building D, and the Coffee Shop needs access to a future drive-through lane and must be placed in Building C. The third floor of Building B is then the only acceptable remaining building for the Accountant's Office.

Flower Shop

The Flower shop must be close to the service drive, and because all retail must go on the ground floor, the only floor that satisfies those requirements is the first floor of the three-story building on the right.

Apartments

Because of the requirements of the other functions, and because the Apartments are required to be near the wooded area, they are to be placed in the remaining available floors in Buildings A & B.

Section: Building Analysis & Programming

Question 26


A client hires an architect to create a masterplan for a new mixed-use waterfront development. The client provides the following requirements:

- Five Residential Towers must be located on corner lots farthest from the Lake.
- Inlet Park must be adjacent to a Residential Tower and the Cultural Center.
- Office buildings must be located on lots closest to the Lake.

- Manufacturing must be located along Innovation Alley and be served by a service lane.

Click in the lot on the site plan to indicate the most appropriate location for the Cultural Center.

Correct answer:

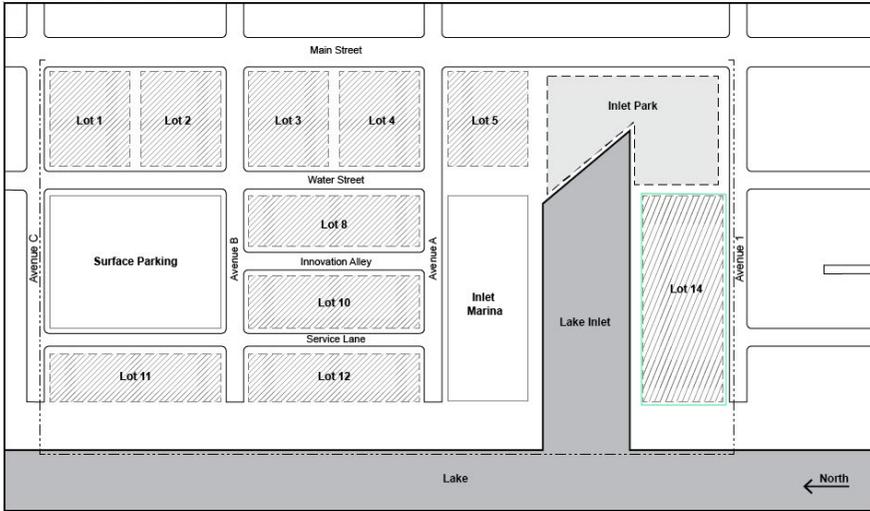

CORRECT RESPONSE

Lot 14

The Cultural Center goes on Lot 14 because the five Residential Towers must occupy the sites farthest from the lake (Lots 1-5) and because the Inlet Park must be adjacent to the Cultural Center. Lot 14 is the only Lot that meets this criteria.

Section: Site Analysis & Programming

Question 27

An owner hires an architect to develop a coffee shop with a drive-through window on an abandoned lot. The lot is on the corner of a principal arterial roadway and a minor arterial roadway. A traffic consultant conducts a peak service hour traffic study with information on the following traffic patterns:

- Existing traffic patterns. (Existing)
- Anticipated traffic patterns if the coffee shop is constructed. (Build)
- Anticipated traffic patterns if the coffee shop is constructed with mitigation measures, such as traffic signal timing modifications. (Build w/ Mitigation)

The local ordinance stipulates that if the traffic in a given direction operates at an "F" Level of Service during the Existing condition, then the delays must decrease in the Build w/ Mitigation condition. If the delays increase in the Build w/ Mitigation condition, then the coffee shop cannot be constructed unless additional mitigation measures are provided.

Click on the row in the Anticipated Levels of Service table to indicate the direction of movement that will require additional mitigation measures.

Correct answer:

Anticipated Levels of Service

Direction / Movement		AM PSH					
		Existing		Build		Build w/ Mit.	
		LOS	Delay	LOS	Delay	LOS	Delay
EB	L	D	48.6	D	48.6	E	56.3
	TR	F	97.1	F	97.1	F	89.4
WB	L	D	50.8	D	50.8	E	55.6
	TR	F	85.5	F	88.7	F	80.9
NB	L	F	118.5	F	134.2	F	125.1
	TR	C	27.1	C	27.1	C	27.5
SB	L	B	19.1	B	19.1	B	18.9
	TR	E	56.7	E	56.7	E	60.6

- * LOS represents Level of Service rated on scale of A to F with A being best and F being worst
- ** Delay represents seconds of delay per vehicle
- ***L represents left lane traffic
- ****TR represents through lane traffic

CORRECT RESPONSE

The row for the left lane of the northbound direction/movement

The delay that results from Build w/ Mitigation in the northbound direction is at an F level (a 125.1-second delay) and it exceeds the existing traffic delay (a 118.5-second delay).

Section: Site Analysis & Programming

Question 28

Local Zoning: Nonconforming Use in a Floodplain

1. No modifications or additions to a nonconforming use or structure shall be permitted unless they comply with this ordinance.
2. If a nonconforming use or the use of a nonconforming structure is discontinued for 12 consecutive months, it is no longer permitted and any future use of the property, and any structure or building thereon, shall conform to the applicable requirements of this ordinance;
3. No modification or addition to any nonconforming structure or any structure with a nonconforming use, which over the life of the structure would equal or exceed 50% of its present equalized assessed value, shall be allowed unless the entire structure is permanently changed to a conforming structure.
4. No maintenance to any nonconforming structure or any structure with a nonconforming use, the cost of which would equal or exceed 50% of its present equalized assessed value, shall be allowed unless the entire structure is permanently changed to a conforming structure with a conforming use in compliance with the applicable requirements of this ordinance.
5. If any nonconforming structure or any structure with a nonconforming use is destroyed or is substantially damaged, it cannot be replaced, reconstructed or rebuilt unless the use and the structure meet the current ordinance requirements. A structure is considered substantially damaged if the total cost to restore the structure to its pre-damaged condition equals or exceeds 50% of the structure's present equalized assessed value.

Refer to the exhibit.

A client hired a design team to evaluate a structure that has been unoccupied for about eight months. The structure is located in a floodplain and is known to be nonconforming. A recent storm causes a landslide that damages the structure, and the client asks the design team to recommend the most economical short-term solution.

What should the design team recommend?

- A. Perform a cost estimate to repair the structure to its pre-damaged condition.
- B. Establish the exact date of discontinued use for the structure.
- C. Rebuild the structure to comply with floodplain ordinance requirements.

Correct answer: A

CORRECT RESPONSE

Perform a cost estimate to repair the structure to its pre-damaged condition.

Performing a cost estimate will establish if the structure was "substantially damaged." If the cost estimate reveals that the cost of repairs exceeds 50% of the present equalized assessed value, then it must be rebuilt to meet ordinance requirements, per item 5 of the zoning description.

Section: Codes & Regulations

Question 29
County Demographic Report

Households Estimate	108,000
Average Household Size	2.18
Average Family Size	2.99

Household Size		
1-Person	40,872	39%
2-Person	34,483	33%
3-Person	13,037	12%
4-Person	11,438	11%
5+ Persons	4,886	5%
Total	104,716	100%

Household Type		
Family-Households	48,455	46%
Non-Family Households	56,261	54%
Total	104,716	100%

Population Estimate	228,400
Daytime Population Estimate	311,800

Age Distribution		
Under 5	13,740	6.0%
5-19	30,790	13.5%
20-24	15,590	6.8%
25-34	54,960	24.1%
35-44	38,020	16.6%
45-54	28,590	12.5%
55-64	22,470	9.8%
65-84	21,280	9.3%
85 and over	2,960	1.3%
Median Age	34.5 years	

Refer to the exhibit.

A developer purchases a hotel and hires an architect to redevelop the building to match the current demographic needs of the community. The existing hotel has the following spaces:

- 100-square-foot Gift Shop on the first floor.
- 300-square-foot to 1,200-square-foot Hotel Rooms.
- 3,000-square-foot rooftop Game Room.

Which design strategy should the architect suggest to the developer?

- A. Convert the first-floor Gift Shop into an after-school classroom for 30 students.
- B. Convert the Hotel Rooms into one- and two-bedroom rental apartments.
- C. Convert the Hotel Rooms into three-bedroom senior living rental units.

Correct answer: B


CORRECT RESPONSE

Convert the Hotel Rooms into one- and two-bedroom rental apartments.

One- and two-bedroom units are appropriate because 72% of the county is made up of one- or two-person households. Also, the design of the hotel features 300- to 1,200-square-foot rooms, a size that enables conversion into one or two-bedroom apartments.

Section: Site Analysis & Programming

Question 30

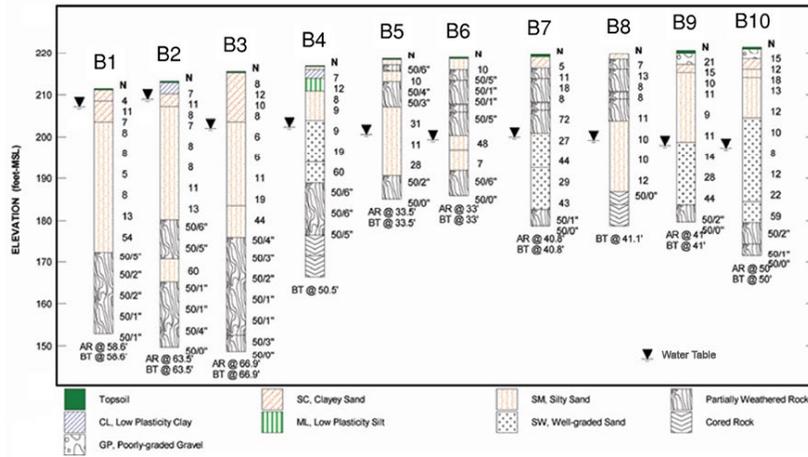


Refer to the exhibit.

A developer wants to build subsidized housing units on a site with two levels of underground parking. The underground parking should have access to the street, and the first floor of the housing units should be near street level. The cost of removing existing bedrock and of the de-watering system is more than the budget will allow.

Click on the area in the site plan to indicate where the housing should be constructed.

Correct answer:

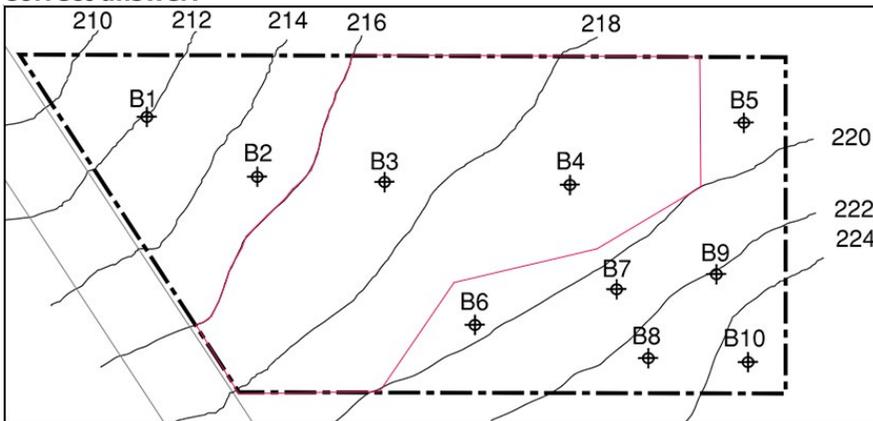


CORRECT RESPONSE

Area between 220-foot and 216-foot elevations that encompasses B3 and B4

The area encompassing boreholes B3 and B4 has a water table that isn't too high and bedrock that isn't too shallow. This area will allow for the construction of the housing.

Section: Building Analysis & Programming

Question 31

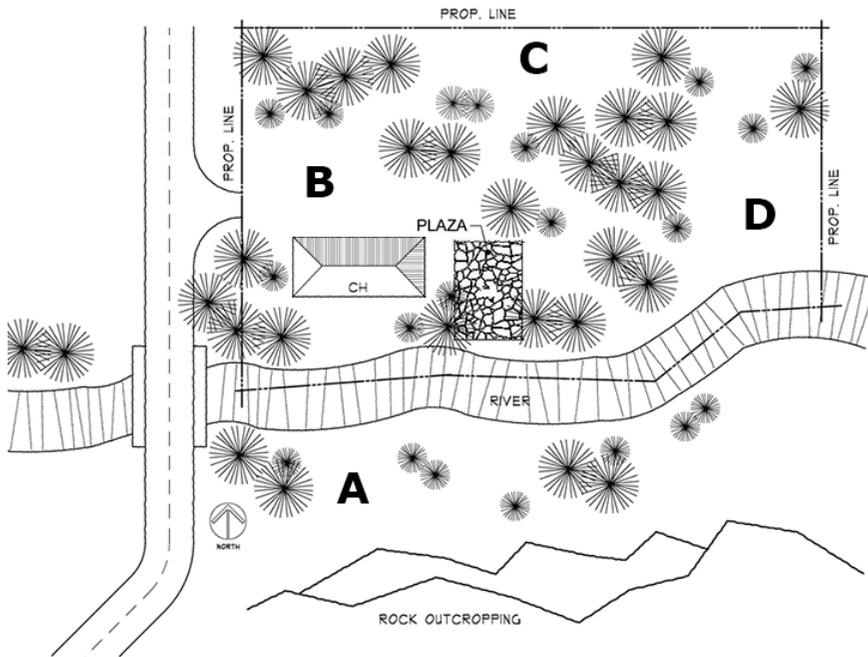

Refer to the exhibit.

A group of artists is planning a retreat community and asks an architect to provide a site study that evaluates functional building placement. The program for the community includes a community hall, painting studio, clay studio, and writer's cabins. The client has requested that the writer's cabins be secluded and have a view of the river and rock outcropping and no trees be disturbed on the site.

Which location on the site plan should the architect place the writer's cabins?

- A. A
- B. B
- C. C
- D. D

Correct answer: D

CORRECT RESPONSE

D

The writer's cabins should be placed just west of the eastern property line between the line and the cluster of trees. The writer's cabins need to have a view of the river and the rock outcropping, and they also need to be secluded. This location is the only one that satisfies the requirements.

Section: Site Analysis & Programming

Question 32

A client desires maximum efficiency in the net-to-gross ratio for a building.

How should the architect develop the spatial relationships of the program?

- A. Locate all program spaces from a single-loaded loop corridor at the perimeter of the building.
- B. Break up large program spaces into many smaller spaces.
- C. Lay out program spaces along double-loaded corridors.

Correct answer: C


CORRECT RESPONSE

Lay out program spaces along double-loaded corridors.

Double-loaded corridors are efficient from a net-to-gross ratio standpoint because they maximize the amount of usable space supported by a single corridor.

Section: Building Analysis & Programming

Question 33

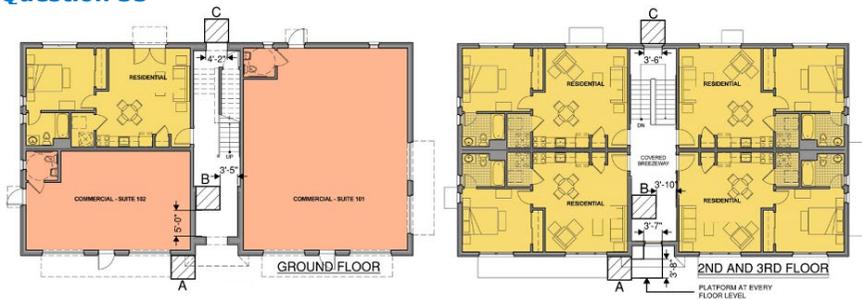

Refer to the exhibit.

An owner wants to install an elevator for resident access in an existing three-story building.

Which location is most appropriate?

- A. A
- B. B
- C. C

Correct answer: B

CORRECT RESPONSE

B

There is sufficient space to place the elevator shaft inside the building and the elevator entry will be visible from the main entrance.

Section: Building Analysis & Programming

Question 34

A developer has hired an architecture firm for the design of a high-density development. The AHJ mandates that the developer provide public, open space within the vicinity of the development that benefits both the new development and the existing community.

Which of the following strategies should the firm recommend for the design of the open space? **Check the three that apply.**

- A. Understand the capabilities of future management entities who will maintain the space.
- B. Determine and analyze the projected needs of the user population in 10 to 20 years.
- C. Assess the existing qualities and characteristics of the potential open space sites.
- D. Design only for the target demographics of the new residential development.
- E. Minimize the initial economic impact by planning primarily passive spaces.
- F. Reduce regular maintenance with minimal open space programming.

Correct answer: ABC

CORRECT RESPONSES

Understand the capabilities of future management entities who will maintain the space.

The proposed open space must be able to be maintained by any future management entity. A poorly maintained facility will drive away potential users of the open space.

Determine and analyze the projected needs of the user population in 10 to 20 years.


Planning the open space should include not only a demand analysis of today's user but a projected demand of that user in 10 or 20 years.

Assess the existing qualities and characteristics of the potential open space sites.

The appropriate open space design can be developed after assessing the existing qualities, characteristics, and capabilities of the site.

Section: Codes & Regulations

Question 35

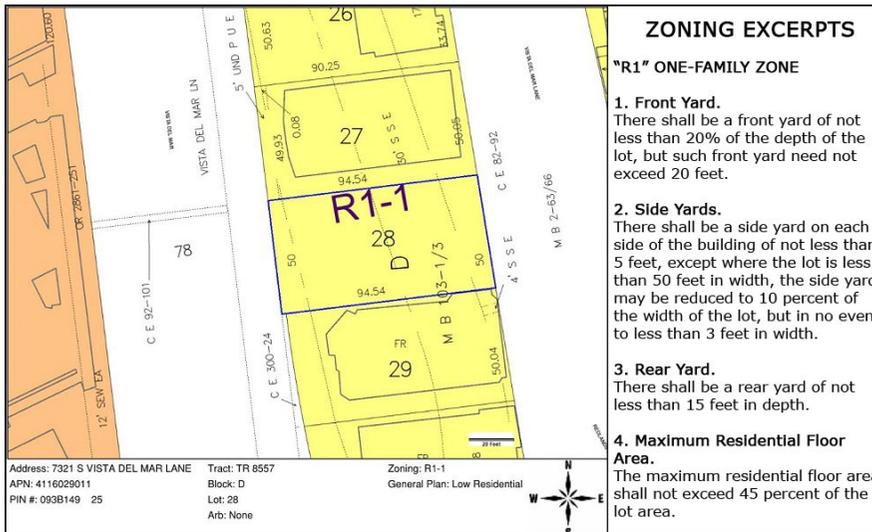

Refer to the exhibit.

An architect is designing a building for Lot 28.

What is the maximum buildable area? Round the answer to the nearest whole number.

- A. 2,127 square feet
- B. 2,328 square feet
- C. 2,425 square feet

Correct answer: A

CORRECT RESPONSE
2,127 square feet

This response takes into account the provision stated in Zoning Excerpt 4 that maximum residential floor area shall not exceed 45% of the lot area.

CALCULATIONS

1. Based on the Zoning Map, the area of Lot 28 is calculated as follows: $94.54' \times 50' = 4,727 \text{ sf}$
2. Based on Zoning Excerpts 1-3, the floor area is calculated as follows: $[\text{lot depth} - \text{front yard (20\% of the depth of the lot)} - \text{back yard}] \times (\text{lot width} - \text{side yard} - \text{side yard}) = \text{floor area}$
3. For the front yard: $0.2 (20\%) \times 94.54' (\text{lot depth}) = 18.908'$
4. For the north/south sides of the site: $94.54' - 18.908' - 15' (\text{back yard}) = 60.632'$
5. For the east/west sides of the site: $50' - 5' - 5' = 40'$
6. $60.632' \times 40' = 2,425.28 \text{ sf}$
7. Per Zoning Excerpt 4, maximum residential floor area shall not exceed 45% of the lot area.
8. For the maximum buildable area: $0.45 (45\%) \times 4,727 \text{ sf} = 2,127.15 \text{ sf}$, rounded to 2,127 sf

Section: Codes & Regulations


Question 36

A homeowner wants to place a ground-mounted photovoltaic (PV) array to provide electricity for their home. Requirements for the placement of the PV array follow:

- The homeowner does not want to see the PV array from the house when looking south towards the river.
- The area required for the PV array is approximately the same size as the house.
- Existing trees and shrubs cannot be disturbed.

Click on the area of the site plan to indicate the most appropriate location for the PV array.

Correct answer:

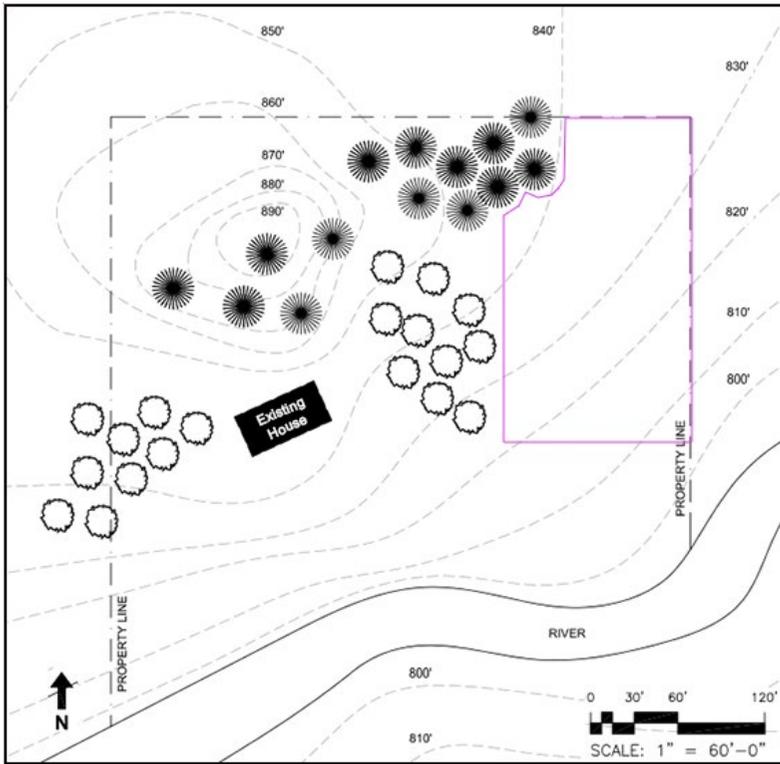


CORRECT RESPONSE

Northeastern corner of the property

This area is the most appropriate location for the PV array because it is within the property line, existing trees will not need to be disturbed, and there is space to accommodate it. Additionally, placing the PV array in this location will not impact the owner's view of the river and there will be nothing to block solar energy from reaching this location, such as a hill.

Section: Environmental & Contextual Conditions

Question 37

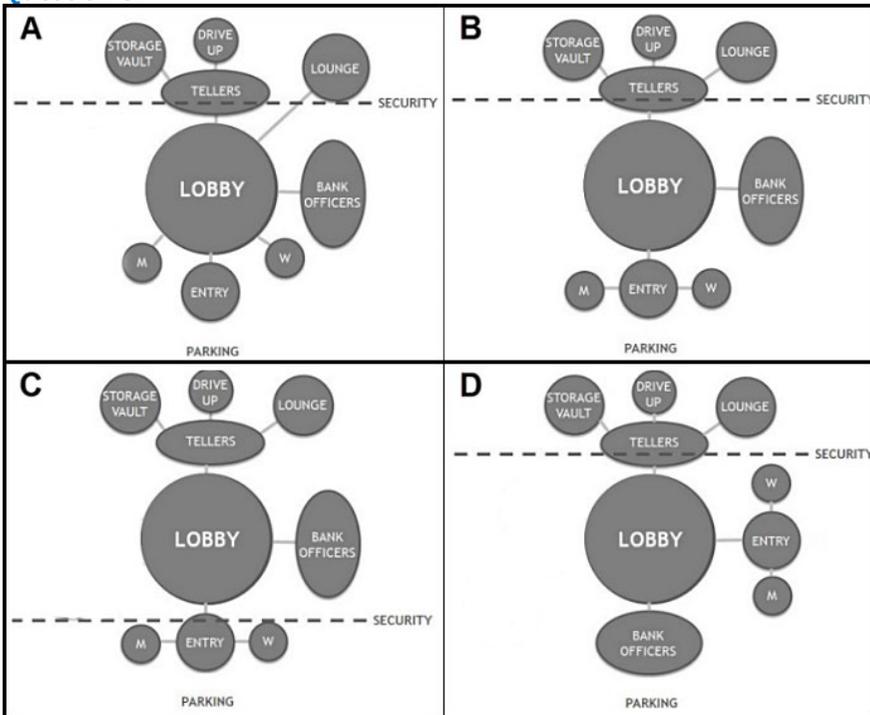

Refer to the exhibit.

The architect of a regional bank is given the following architectural program:

- An Entry with Men's and Women's restrooms must be located next to the Parking lot.
- A Lobby must have immediate connection to the Tellers and Bank Officers.
- The Lounge for employees must be private.
- A Drive-Up window must be accessible to the exterior and to Tellers.
- A Security perimeter must protect Tellers and the Storage Vault and not be accessible by customers.

Which bubble diagram meets the program requirements?

- A. A
- B. B
- C. C
- D. D

Correct answer: B

CORRECT RESPONSE

B

This bubble diagram provides a Security perimeter that is not accessible by customers, a Lobby that has an immediate connection to the Tellers and Bank Officers, a Lounge that is private, and an Entry with Men's and Women's restrooms that is located next to the parking lot.

Section: Building Analysis & Programming


Question 38

A client owns a site that takes up an entire city block. Part of the site has an existing historic building and includes an historic district designation. Any proposed work within the historic district would need to be reviewed by the Historic Resource Commission for approval. The client wants to develop the site in the following ways:

- Renovate the existing seven-story historic building into new apartments.
- Construct an addition to the historic building.
- Construct a new, free-standing, four-story office building.
- Build a new 200-space surface parking lot that would serve both buildings.

Click on the area of the site map to indicate where the new office building should be located.

Correct answer:

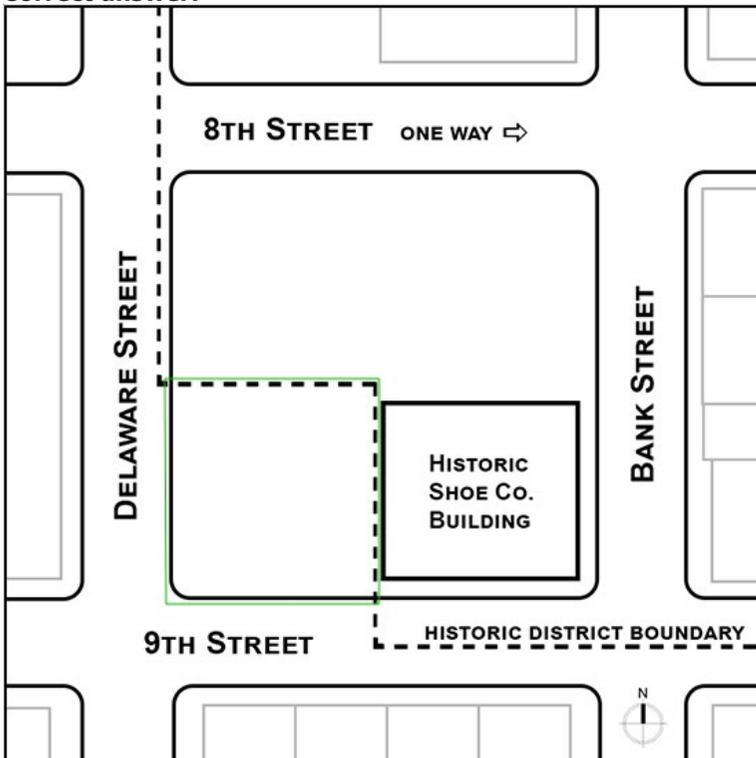

CORRECT RESPONSE

Southwest corner of the block, just outside of the Historic District

This is the most appropriate location for the new office building as it lies outside of the historic district and would not require review or approval by the Historic Resource Commission. Also, two-way traffic on both 9th and Delaware streets makes this the most accessible location for the office.

Section: Site Analysis & Programming

Question 39

SECTION 411 SPECIAL AMUSEMENT AREAS

411.1 General. *Special amusement areas* having an *occupant load* of 50 or more shall comply with the requirements for the appropriate Group A occupancy and Sections 411.1 through 411.7. *Special amusement areas* having an *occupant load* of less than 50 shall comply with the requirements for a Group B occupancy and Sections 411.1 through 411.7.

Exception: *Special amusement areas* that are without walls or a roof and constructed to prevent the accumulation of smoke need not comply with this section.

[F] **411.2 Automatic sprinkler system.** Buildings containing *special amusement areas* shall be equipped throughout with an *automatic sprinkler system* in accordance with Section 903.3.1.1. Where the *special amusement area* is temporary, the sprinkler water supply shall be of an *approved temporary means*.

Exception: *Automatic sprinklers* are not required where the total floor area of a temporary *special amusement area* is less than 1,000 square feet (93 m²) and the *exit access travel distance* from any point in the *special amusement area* to an exit is less than 50 feet (15 240 mm).

[F] **411.3 Automatic smoke detection.** Buildings containing *special amusement areas* shall be equipped with an *automatic smoke detection system* in accordance with Section 907.2.12.

[F] **411.4 Emergency voice/alarm communications system.** An *emergency voice/alarm communications system* shall be provided in accordance with Section 907.2.12.

411.5 Puzzle room exiting. *Puzzle room* exiting shall comply with one of the following:

1. Exiting in accordance with Chapter 10.
2. An alternative design approved by the building official.
3. Exits shall be open and readily available upon activation by the automatic fire alarm system, automatic sprinkler system, and a manual control at a constantly attended location.

411.6 Exit marking. Exit signs shall be installed at the required *exit* or *exit access doorways* serving *special amusement areas* in accordance with this section and Section 1013. *Approved* directional exit markings shall be provided. Where mirrors, mazes or other designs are utilized that disguise the path of egress travel such that they are not apparent, *approved* and *listed* low-level exit signs that comply with Section 1013.5, and directional path markings *listed* in accordance with UL 1994, shall be provided and located not more than 8 inches (203 mm) above the walking surface and on or near the path of egress travel. Such markings shall become visible in an emergency. The directional exit marking shall be activated by the *automatic smoke detection system* and the *automatic sprinkler system* in accordance with Section 907.2.12.

411.6.1 Photoluminescent exit signs. Where *photoluminescent exit* signs are installed, activating light source and viewing distance shall be in accordance with the listing and markings of the signs.

411.7 Interior finish. The *interior finish* in *special amusement areas* shall be Class A in accordance with Section 803.1.

Refer to the exhibit.

To take advantage of a large city's demand for seasonal Halloween amusements, a client hires an architect to design a new, temporary escape room business, which is considered a special amusement building by the IBC. The client has leased a 2,000-square-foot space in an existing commercial center that will feature a design that disguises doors and the path of egress as part of the amusement. The building does not have a sprinkler system, and the cost to add one would exceed the proposed budget for the project.

Which of the following design choices should the architect make in order to comply with code? **Check the three that apply.**

- A. Escape room spaces will not exceed 1000 total square feet.
- B. Escape rooms will be equipped with automatic smoke detection.
- C. Escape rooms will be equipped with a class C fire extinguisher.
- D. Escape rooms will have photoluminescent exit signage.
- E. Construction will be 3-hour fire-rated and use non-combustible materials.
- F. All interior finishes will be Class B or higher.

Correct answer: ABD

CORRECT RESPONSES

Escape room spaces will not exceed 1000 total square feet.

The owner informs the architect that the budget does not allow for the addition of a sprinkler system to the building. The IBC allows for this in special amusement buildings, but IBC 411.2 describes how the absence of a sprinkler system is only allowed if the temporary amusement space is less than 1000 square feet. Thus, the spaces in the building must be kept under 1000 total square feet.

Escape rooms will be equipped with automatic smoke detection.


All special amusement rooms in the building must be equipped with automatic smoke detection. IBC 411.3 states that special amusement buildings must be equipped with an automatic smoke detection system.

Escape rooms will have photoluminescent exit signage.

Escape rooms use doors and path of egress travel that may not be evident as part of their design. IBC 411.6 requires low-level exit signs and directional path markings must be provided and will become visible, or photoluminescent, in an emergency.

Section: Codes & Regulations

Question 40

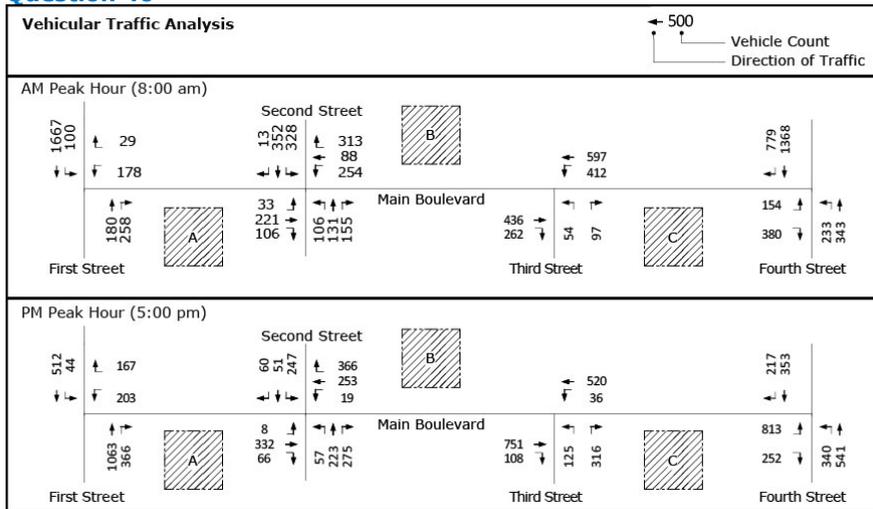

Refer to the exhibit.

A client wants to build a new coffee shop with a drive-through window on Main Boulevard, which has a planted median preventing non-intersection left turns. The coffee shop will have operating hours from 5:00 am to 12:00 p.m.

Based on current traffic loads, which one of the potential sites is most appropriate for the coffee shop?

- A. A
- B. B
- C. C

Correct answer: B

CORRECT RESPONSE

B

651 cars will pass site B during the AM peak traffic hour, serving the largest potential customer base during operating hours.

CALCULATIONS

1. Cars passing site B on Main Boulevard at the AM peak hour: 597 cars
2. Cars passing site B from Third Street at the AM peak hour: 54 cars
3. Total cars passing site B at the AM peak hour: 651 cars

Section: Site Analysis & Programming


Question 41

An architect is designing a new performing arts center in the northeastern United States. The owner has provided the following requirements for room adjacencies:

- The Reception hall must be adjacent to the Drop-Off and directly connected to the Auditorium.
- The Auditorium must accommodate three levels of raked seating.
- The Rehearsal room needs to receive direct sun for morning rehearsals.
- The Workshop for stage sets must allow for ease of movement between the Loading area and the Stage.

Click in the dashed space in the section drawing to indicate the most appropriate location for the Rehearsal room.

Correct answer:

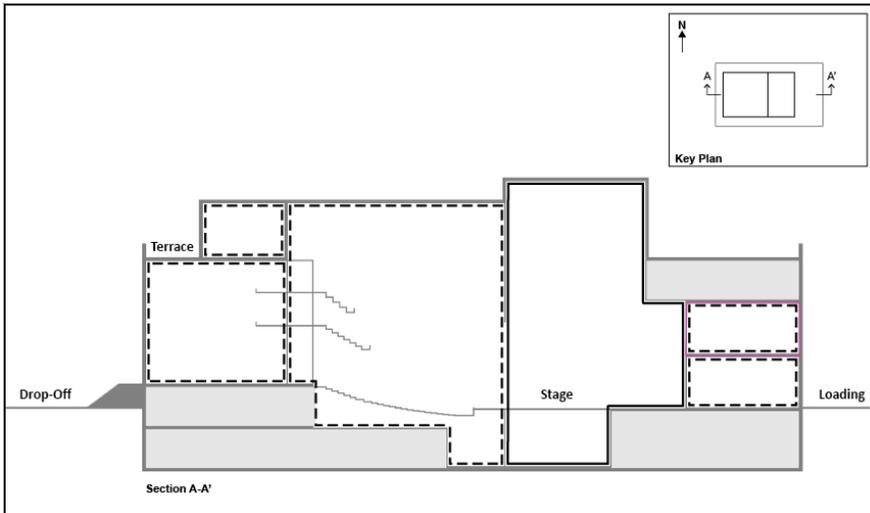

CORRECT RESPONSE

Space on east side of building above the space with direct adjacency to Loading and Stage areas

The Rehearsal room is to be located on the east side of the building, as indicated by the key plan, for exposure to morning daylight in the northeastern United States. It cannot be located next to the Loading area because the owner requires that the Workshop be adjacent to both the Stage and the Loading area.

Section: Building Analysis & Programming

Question 42

3.2 Space Classifications


Occupant Area

Occupant Area consists of 1. *Tenant Area* and 2. *Tenant Ancillary Area*.

1. Tenant Area (IPMS 3 under Method A)

The demised portions of a Building suitable for occupancy by individual tenants which normally house personnel, equipment, fixtures, furniture, supplies, goods, or merchandise. Any portion within the demised boundaries of Tenant Area that a tenant has Exclusive Use of (including, but not limited to Unenclosed Occupant Features, Non-Permanent Dedicated Restrooms, Elevator Lobbies, Circulation Areas, and Occupant Voids) shall be considered part of Tenant Area. Service Areas of a Permanent nature, within the demised boundaries of a Tenant Area are excluded from Tenant Area and allocated to the appropriate Space Classification.

The Landlord may elect to separately disclose any areas within Tenant Area, depending on the particular business needs of the Landlord. However, Unenclosed Occupant Features are always disclosed separately in the Global Summary of Areas.

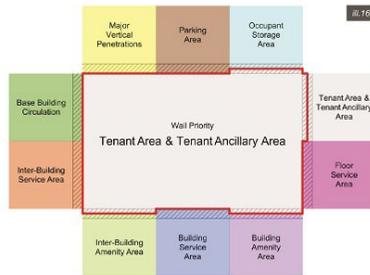


Refer to the exhibit.

A prospective tenant is considering leasing Suite 200 in an existing office building. The prospective tenant hires an architect to review the existing building's drawings and provide the usable area for Suite 200.

Click on the location on the demising wall between Suite 200 and Shell Space 300 in the plan detail to indicate the boundary from where the usable area should be calculated.

Correct answer:

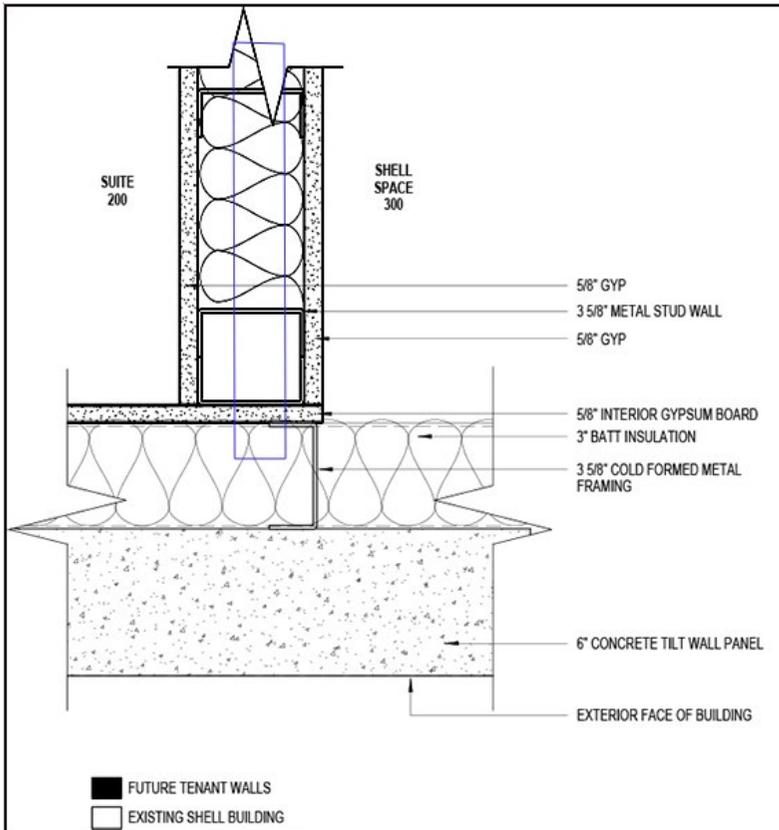


CORRECT RESPONSE

Centerline of the demising wall

Building Owners and Managers (BOMA) standards state that usable area should be calculated from the center of the demising wall.

Section: Codes & Regulations

Question 43

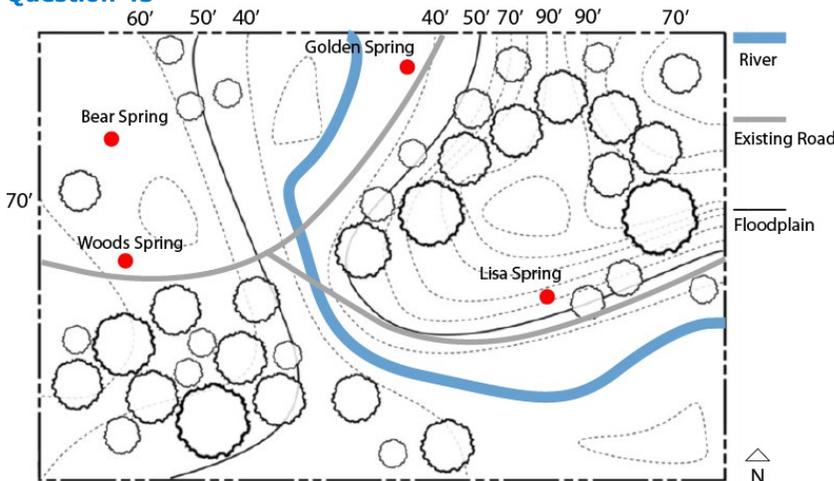

Refer to the exhibit.

A developer purchases a piece of land with several natural hot springs and plans to build a resort that takes advantage of local geothermal resources. The client has requested that the development of the site be cost-effective. The resort has four major program requirements:

- Low-Rise Hotel Program: Minimize construction and land disruption.
- Entertainment Program: Locate close to the resort and to an existing spring.
- Parking: Connect with an existing road.

- MEP and Support Program: Cannot be located in the floodplain.

Which spring should the architect recommend developing?

- A. Lisa Spring
- B. Golden Spring
- C. Bear Spring
- D. Woods Spring

Correct answer: D


CORRECT RESPONSE

Woods Spring

Woods Spring is connected with an existing road, is not in a floodplain, and is on flat land, which means that construction needed to develop the site will be less expensive.

Section: Environmental & Contextual Conditions

Question 44

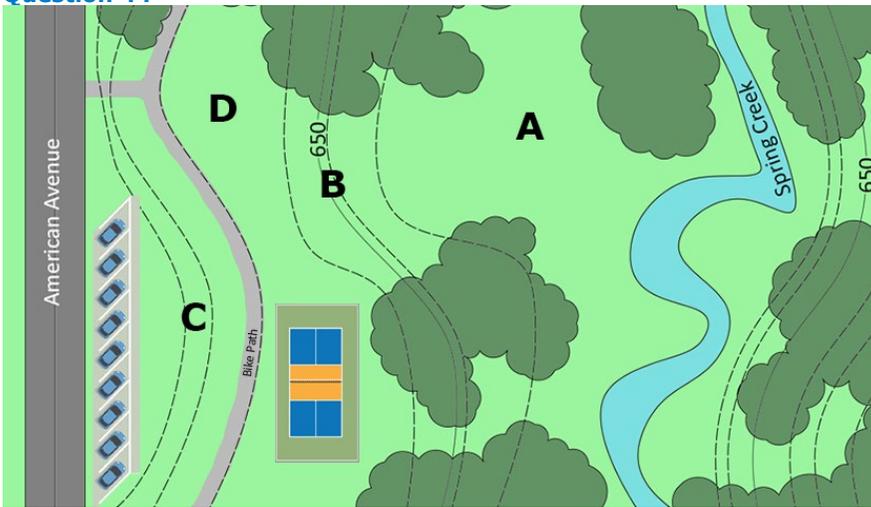

Refer to the exhibit.

A city is redeveloping a little-used arboretum site. The program consists of a restroom building, tennis court, and parking. The site slopes from American Avenue down toward Spring Creek, with the existing floodplain at an elevation of 646 feet. No permanent structures may be constructed in the floodplain. Other requirements follow:

- Existing trees should not be disturbed, including from grading.
- Regrading should be avoided.

Which location on the site plan should the architect place the restroom building?

- A. A
- B. B
- C. C
- D. D

Correct answer: D

CORRECT RESPONSE

D

This location is flat, does not require grading, and is outside of the floodplain.

Section: Site Analysis & Programming

Question 45

A client hires an architect to design a new 500' x 600' open-air amphitheater and help with site evaluation and selection. The site will require the following:

- Number of parking spaces: 1,450
- Parking space dimensions: 10' x 18'
- Double-loaded 24-foot-wide drive aisle

How many acres will be required for the venue? Round to the nearest whole number.

Reference Formula:
1 acre = 43,560 sf

- A. 7 acres
- B. 10 acres
- C. 13 acres
- D. 17 acres

Correct answer: D

CORRECT RESPONSE
17 acres

The combined square footage required for parking and for the amphitheater will give the number of acres required for the venue.

CALCULATIONS

1. Square footage per parking space: 10' x [18' + 12' (half of the square footage for the drive aisle is allocated to each parking space)] = 300 sf per space
2. Square footage for all parking: 1,450 parking spaces x 300 sf per space = 435,000 sf
3. Square footage of amphitheater: 500' x 600' = 300,000 sf
4. Total square footage required: 435,000 sf (for parking) + 300,000 sf (for the amphitheater) = 735,000 sf
5. Total acreage required: 735,000 sf / 43,560 sf per acre = 16.87 acres, rounded to 17 acres


Section: Site Analysis & Programming

Question 46

An architecture firm is designing a new two-story residence on a hilly site in a cold climate. Winter winds predominantly come from the north. The owner directs the firm to site the residence in a microclimate that takes advantage of solar radiation and wind protection and avoids cold air collection.

Click on the area of the site plan to indicate where the finished first floor elevation of the house should be located.

Correct answer:

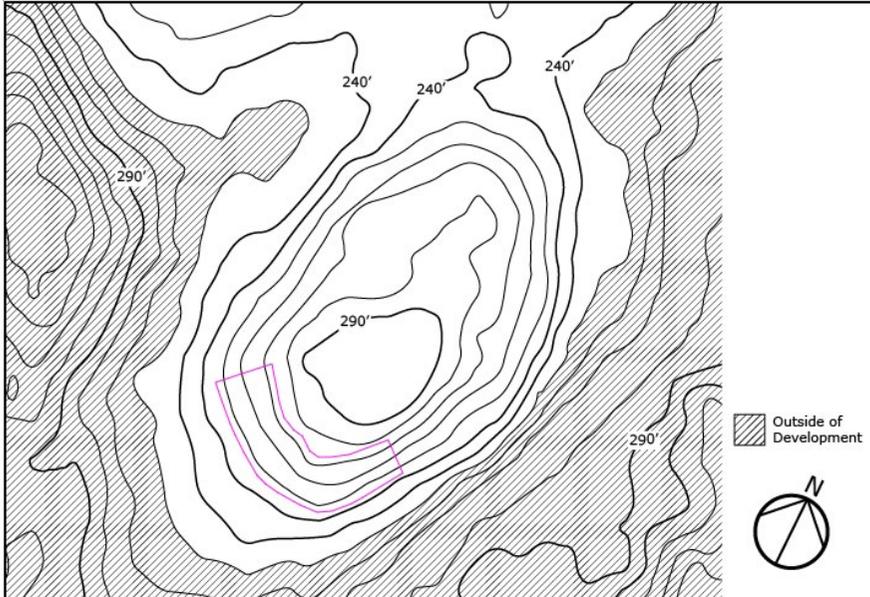

CORRECT RESPONSE

Elevation between 250 feet and 270 feet

The most favorable microclimate in a cold region with hilly terrain is low on a south-facing slope in order to take advantage of greater solar radiation. At this site, the first floor elevation of the residence needs to be placed at a point on the south-facing slope that is low enough to take advantage of the protection that the hill will afford from northerly winds, but it also needs to be placed high enough to avoid cold air collection at the bottom of the valley.

Section: Environmental & Contextual Conditions

Question 47

An client owns an historic structure located in the northeastern United States. It features a south-facing, front facade with fine brick detailing and a parking area to the rear of the structure that is scheduled to be demolished and redeveloped.

Which one of the following sustainable strategies should the architect recommend?

- A. Incorporate an exterior insulated finish system that increases the overall R-value of the facade.
- B. Install a geothermal system to increase mechanical system efficiency.
- C. Replace the existing roof with a low albedo material.
- D. Install a new solar panel array on the front facade.

Correct answer: B

CORRECT RESPONSE

Install a geothermal system to increase mechanical system efficiency.

With the redevelopment of the rear parking area, new geothermal wells can easily be incorporated into the design in order to take advantage of a natural energy source.

Section: Building Analysis & Programming

Question 48

A developer hires an architect to create a masterplan for an urban infill site that is one entire city block. The developer owns most of the lots on the block and is working to acquire the three remaining lots, which are owner-occupied. The city offers incentives if the project can move forward with construction in less than a year and can incorporate a bus stop and public garden space on the site.

Which of the following steps should the architect take first in order to secure the incentives? **Check the three that apply.**

- A. Complete a full pricing set of drawings for all proposed buildings.
- B. Discuss the project with the nearby neighborhood association.
- C. Recommend that the owner delay design until all parcels are purchased.
- D. Coordinate details for the bus stop with the transportation authority.
- E. Have soil tests performed to find the best location for the public garden.
- F. Schedule a preapplication meeting with the city planning and zoning department.

Correct answer: BDF

CORRECT RESPONSES

Discuss the project with the nearby neighborhood association.

Proactive community engagement helps streamline the development process and it is always best to do so quickly if concerned about incentives or schedule.

Coordinate details for the bus stop with the transportation authority.


It can take several months to navigate the jurisdictional process and different committees within city government. If the incentives hinge on including a bus stop, then engaging the transportation authority early will be necessary as they will impact later design.

Schedule a preapplication meeting with the city planning and zoning department.

A preapplication meeting can be scheduled while still in the schematic design phase and will often highlight site challenges and city concerns. This should be done early in the process.

Section: Environmental & Contextual Conditions

Question 49

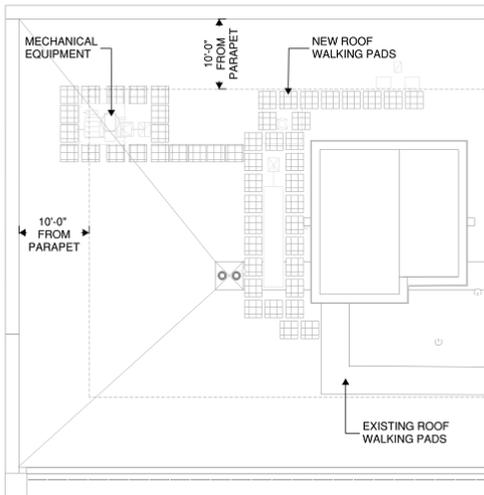

1015.3 Height

Required guards shall be not less than 42 inches (1067 mm) high, measured vertically as follows:

1. From the adjacent walking surfaces.
2. On stairways and stepped aisles, from the line connecting the leading edges of the tread nosings.
3. On ramps and ramped aisles, from the ramp surface at the guard.

1015.6 Mechanical Equipment, Systems and Devices

Guards shall be provided where various components that require service are located within 10 feet (3048 mm) of a roof edge or open side of a walking surface and such edge or open side is located more than 30 inches (762 mm) above the floor, roof or grade below. The guard shall extend not less than 30 inches (762 mm) beyond each end of such components. The guard shall be constructed so as to prevent the passage of a sphere 21 inches (533 mm) in diameter.

Exception: Guards are not required where personal fall arrest anchorage connector devices that comply with ANSI/ASSE Z 359.1 are installed.

Refer to the exhibit.

An architect is working on a commercial fit-out project that includes a commercial kitchen. The kitchen requires the placement of mechanical equipment on the roof, which is flat and has a 30-inch-high parapet. The mechanical equipment must allow for maintenance access on all sides, and the architect specifies walking pads for this purpose.

Which safety measure should be taken to provide for the maintenance of the mechanical equipment?

- A. Provide access to two sides of the mechanical equipment within the 10-foot roof edge zone.
- B. Install safety tieback anchors outside of the 10-foot roof edge zone.
- C. Install safety tieback anchors within the 10-foot roof edge zone.
- D. Use the existing 30-inch-high parapet for fall protection.

Correct answer: B


CORRECT RESPONSE

Install safety tieback anchors outside of the 10-foot roof edge zone.

Safety tieback anchors are considered personal fall-arrest devices. They need to be installed outside of the 10-foot roof edge zone so the person connecting the fall protection does not have to encroach on the 10-foot roof edge zone.

Section: Building Analysis & Programming

Question 50

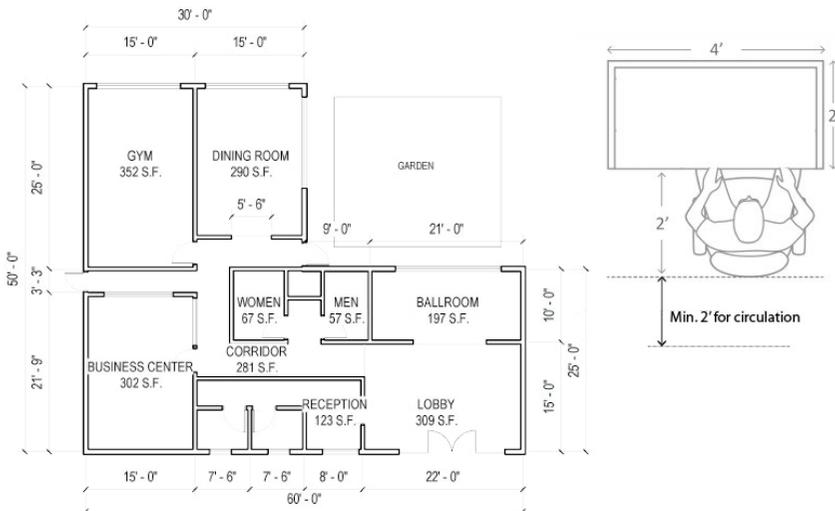

Refer to the exhibit.

A homeowners association (HOA) decides to upgrade their clubhouse by renovating one existing room into a new after-school classroom. Workstations cost \$2,000 each and the cost of the classroom renovation is \$20 per square foot. The total budget for the renovation is \$26,000. The HOA has the following requirements for the classroom:

- Accommodate 10 workstations.
- Contain an exterior window.
- All workstations must be adjacent to a wall or window.

Which room should the HOA renovate?

- A. Dining Room
- B. Business Center
- C. Gym
- D. Ballroom

Correct answer: A

CORRECT RESPONSE

Dining Room

The Dining Room has natural light, a view of the garden, 290 square feet, and roughly 55 feet of wall length to accommodate the 10 workstations.

CALCULATION

1. The budget for the whole project is \$26,000.
2. Workstation cost: $10 \times 2,000 = \$20,000$
3. Room renovation cost: $\$26,000 - \$20,000 = \$6,000$
4. Maximum Renovation Area: $\$6,000 / \$20 = 300 \text{ sf}$

Section: Building Analysis & Programming


Question 51

A university wants to expand its business school into a downtown area. A study of about 12 city blocks is being evaluated for available tenant space. University requirements include the following:

- 8,000 square feet of classroom and office space and must be on one or two levels.
- Located within a commercial or mixed-use city block.
- The university prefers a location along the city's designated bike lane for student use.

Click on the site available for lease in the plan that is most appropriate for the business school.

Correct answer:

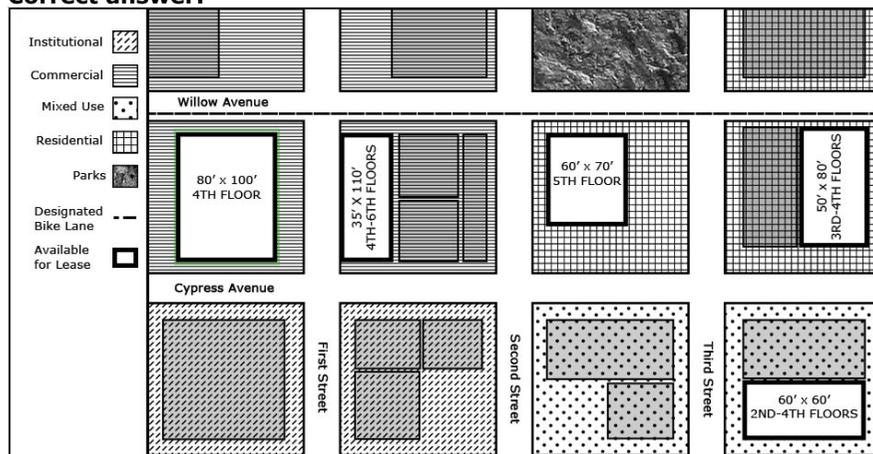

CORRECT RESPONSE

80' x 100' 4TH FLOOR

This location is in a commercial city block, is along the designated bike trail, can be placed on one or two floors, and meets the 8,000-square-foot size requirement.

CALCULATION

1. For the square footage of the site: $80' \times 100' = 8,000 \text{ square feet}$

Section: Site Analysis & Programming

Question 52

An architect is designing an energy-efficient home in the Southwest. The client has asked the architect to provide recommendations for passive cooling of the new home.

Which of the following passive cooling strategies should the architect use? **Check the three that apply.**

- A. Roof ponds
- B. Trombe wall
- C. Evaporative mechanical cooling
- D. Courtyards with fountains
- E. Materials with high thermal mass
- F. Large windows to the east and west

Correct answer: ADE

CORRECT RESPONSES

Roof ponds

Roof ponds can provide thermal mass to the roof structure, which is a passive strategy to aid the cooling of the home.

Courtyards with fountains


Courtyard fountains provide evaporation and keep the air cool within the spaces of a home.

Materials with high thermal mass

Materials with high thermal mass help delay heat transmission and help with heat flushing during the night, making the building cooler during nighttime.

Section: Environmental & Contextual Conditions

Question 53

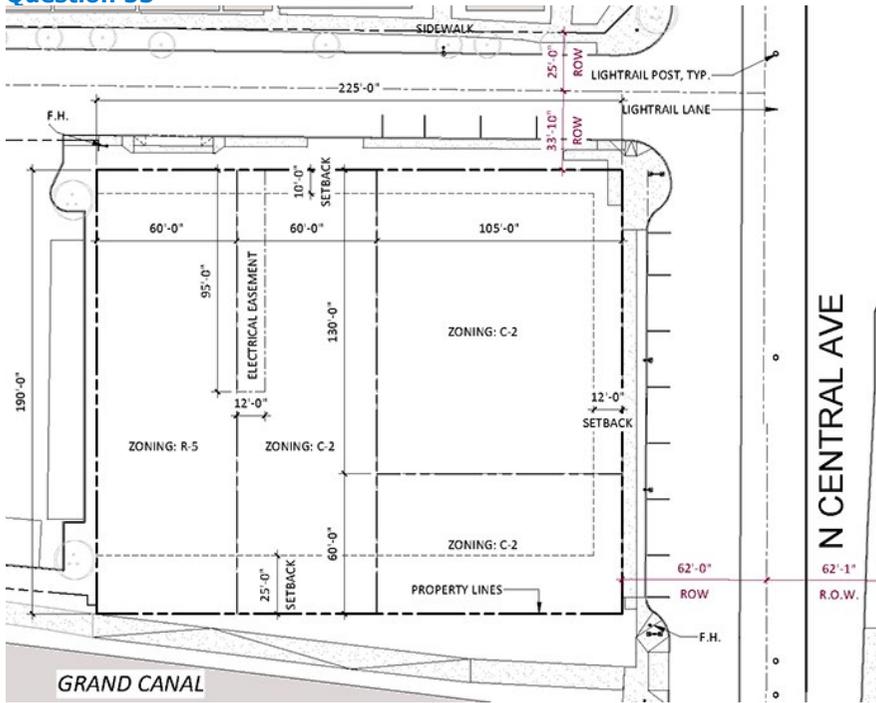

Refer to the exhibit.

An owner wants to develop a residential multifamily building on the lot zoned as R-5 with the maximum allowable footprint. In addition to the setbacks already established for the canal to the south and the street to the north, the side setbacks are 20 feet. The owner wants to build each story to the extent of the required setbacks. The floor area ratio for the property is 4.0.

What is the maximum number of full stories that can be constructed on the site?

- A. 4 stories

- B. 5 stories
- C. 14 stories
- D. 15 stories

Correct answer: C

CORRECT RESPONSE
14 stories

CALCULATIONS

1. For the north/south sides of the site: 190' (length of R-5 lot) - 10' (north setback) - 25' (south setback) = 155'
2. For the east/west sides of the site: 60' (width of R-5 lot) - 20' (side setback) - 20' (side setback) = 20'
3. For the building footprint area: 155' (length allowed) x 20' (width allowed) = 3,100 sf
4. For maximum building square footage: 190' (total length) x 60' (total width) = 11,400 sf x 4 (FAR) = 45,600 sf
4. For the maximum number of full stories: 45,600 sf / 3,100 sf (full building footprint) = 14.7 stories = 14 stories


Section: Site Analysis & Programming

Question 54

An architect needs to preserve the naturally occurring runoff of a new development as a critical project requirement.

Click on the area of the survey where the site should remain undeveloped.

Correct answer:

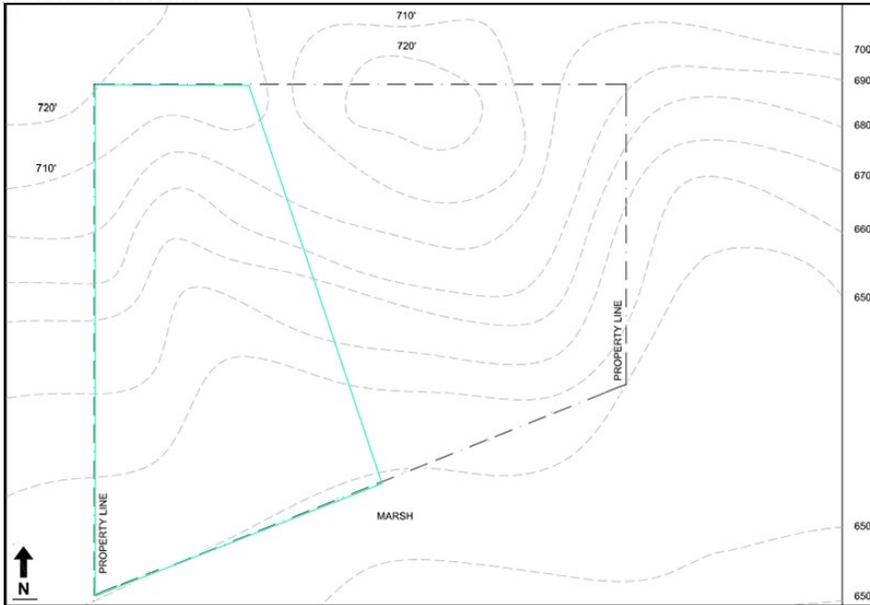

CORRECT RESPONSE

This area represents a swale, which is to be protected from development.

Section: Environmental & Contextual Conditions

Question 55

What is a reason to include interstitial space in a building design?

- A. To decrease the net-to-gross conversion factor.
- B. To decrease the area of the building skin.
- C. To provide a transition between dissimilar functions.
- D. To provide easy access to building subsystems.

Correct answer: D

CORRECT RESPONSE

To provide easy access to building subsystems.

Interstitial space houses building services such as piping and ductwork and is sized to allow access for modifying, replacing, or relocating system runs.

Section: Building Analysis & Programming

Question 56

CODE	FUNCTIONAL ELEMENT	# OF RMS	NSF/ RM	TTL NSF/ ROOM	Notes
1 ENTRY SPACES					
1.	Main Entry Vestibule	1	200	200	First Floor
2.	Rear Vestibule	1	120	120	First Floor
3.	First floor lobby	1	3,000	3,000	
4.	Elevator Lobby	3	500	1,500	1 per floor
SUBTOTAL-NSF				4,820	
NSF to DGSP Multiplier				1.05	
TOTAL CATEGORY GSF				5,061	
2 AMENITIES AND MANAGEMENT					
1.	Large Conference Room	1	500	500	first floor
2.	Small Conference Room	1	250	250	first floor
3.	Manager Office	1	120	120	Adjacent to 2.7
4.	Pantry	1	120	120	access to 2.1
5.	Vending	1	40	40	adjacent to 1.2
6.	Janitor Closet	3	25	75	1 per floor
7.	Mail Room	1	80	80	adjacent to 1.2
8.	Restrooms	6	400	2,400	2 per floor
SUBTOTAL-NSF				3,585	
NSF to DGSP Multiplier				1.30	
TOTAL CATEGORY GSF				4,661	
3 SHELL SPACES					
1.	Shell Space	9	10,000	90,000	3 per floor
SUBTOTAL-NSF				90,000	
NSF to DGSP Multiplier				1.40	
TOTAL CATEGORY GSF				126,000	
5 BUILDING SUPPORT SPACES					
1.	Mechanical Room	1	300	300	first floor
2.	Mechanical Penthouse	2	1,000	2,000	roof
3.	Electrical Closets	6	80	480	2 per floor
4.	Fire Pump Room	1	85	85	exterior door
5.	Security Room	1	120	120	near 1.3
6.	Main Telecom Room	1	120	120	near 5.5
7.	Telecom Closets	2	50	100	1 per floor above the 2nd floor
SUBTOTAL-NSF				3,205	
NSF to DGSP Multiplier				1.05	
TOTAL CATEGORY GSF				3,365	
6 VERTICAL CIRCULATION					
1.	Public & Service Elevators	3	140	420	1 per floor
2.	Elevator Shaft	0	140	0	
3.	Stairs	6	200	1,200	2 stairs per floor
SUBTOTAL-NSF				1,620	
NSF to DGSP Multiplier				1.10	
TOTAL CATEGORY GSF				1,782	
CATEGORY SUMMARY					
1	ENTRY SPACES			5,061	
2	AMENITIES AND MANAGEMENT			4,661	
3	SHELL SPACES			126,000	
4	BUILDING SUPPORT SPACES			3,365	
5	VERTICAL CIRCULATION			1,782	
SUBTOTAL-DGSF				140,869	
DGSF to BGSF Multiplier				1.20	
BUILDING GROSS SQUARE FOOTAGE				169,043	

Refer to the exhibit.

While an architect is preparing a building program for a three-story, multi-tenant office building, the owner requests a fourth, additional floor. In accommodating this change, the architect makes the following assumptions:

- The second and third floor programs match, and the fourth floor will also match their programs.
- All public, accessible vertical circulation elements will be extended to the fourth floor.
- All mechanical and building support spaces are adequate to serve the fourth floor.
- A Janitor's Closet is not required on the fourth floor.
- The first floor of the building is the only floor with doors that exit to the exterior.

Which functional elements will require a change in the number of rooms because of the addition of the fourth floor? **Check the four that apply.**

- A. Elevator Lobby
- B. Janitor Closet
- C. Restrooms
- D. Shell Space
- E. First Floor Lobby
- F. Public & Service Elevators

Correct answer: ACDF

CORRECT RESPONSES

Entry Spaces - 4. Elevator Lobby

An additional elevator lobby will be needed in order to match the program of the Third Floor.

Amenities and Management - 8. Restrooms

Restrooms will increase by two in order to match the program of the Third Floor.

Shell Spaces - 1. Shell Space

Shell Space will increase by three in order to match the program of the Third Floor.

Vertical Circulation - 1. Public & Service Elevators

The elevators for the public and service (the non-public shaft) will increase by one as vertical circulation elements extend to the Fourth Floor.

Section: Building Analysis & Programming

Question 57

An architect is designing a new community center in a hot, arid climate that is predominately exposed to southern winds. The client has the following requirements:

- The community center will be made up of three rectangular buildings arranged in a U-shape configuration.
- A meditation garden will be located in the center of the U-shape and must be usable for as much of the year as possible.
- Building location and orientation on the site should maximize passive cooling design strategies for the meditation garden.

Which direction should the open end of the U-shape face?

- A. North
- B. South
- C. East
- D. West

Correct answer: A



CORRECT RESPONSE

North

Orienting the buildings to the east, west, and south would maximize shading of the courtyard throughout the entire day. It would also provide protection from the southern winds, which do not promote cooling in arid climates.

Section: Environmental & Contextual Conditions

Question 58

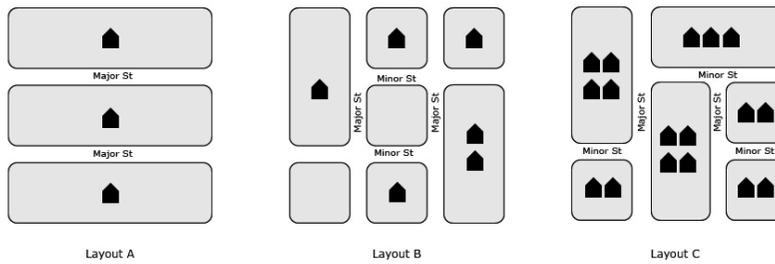

Refer to the exhibit.

A township wants to develop a masterplan for a new town center that prioritizes pedestrian comfort.

Which site layout is most appropriate for minimizing prevailing winds?

- A. Layout A
- B. Layout B
- C. Layout C

Correct answer: C


CORRECT RESPONSE

Layout C

A discontinuous street organization with higher density and many T-intersections can slow and block wind flow in streets.

Section: Environmental & Contextual Conditions

Question 59

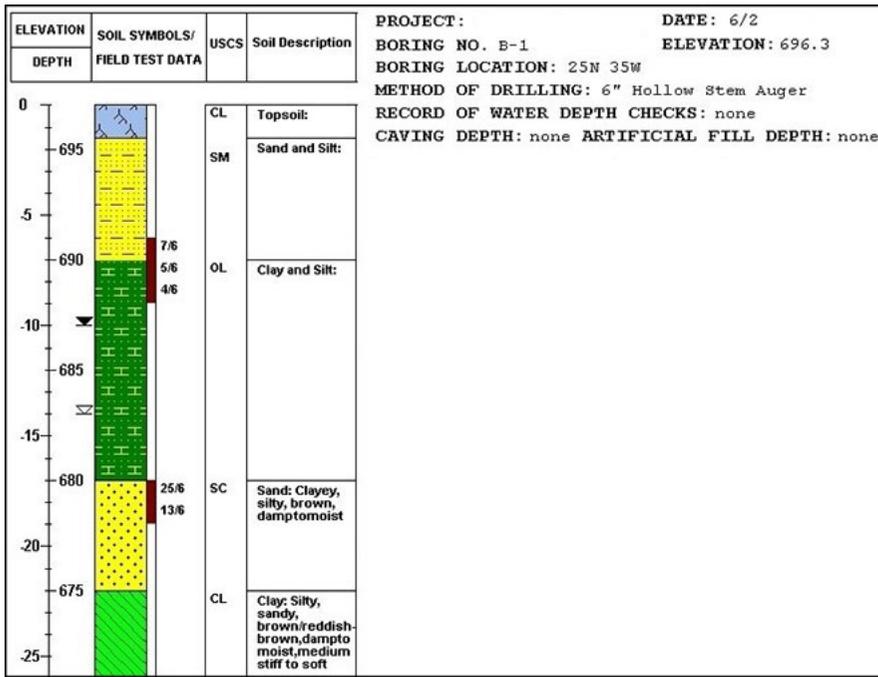

Refer to the exhibit.

An architect is designing a commercial building with a one-story underground parking garage. The parking structure has a floor-to-floor height of 10.5 feet. A geotechnical engineer has provided a borehole log, which the architect will use to determine the most appropriate, cost-effective foundation type.

Which foundation type should the architect choose for the building?

- A. Mat foundation
- B. Pier foundation
- C. Pile foundation
- D. Slab-on-grade foundation

Correct answer: A


CORRECT RESPONSE

Mat foundation

A mat foundation is a continuous slab resting on the soil that extends over the entire footprint of the building. This foundation type supports the building by transferring its weight to the ground and is commonly used when the soil is weak. Based on the borehole log, this foundation will be the most appropriate for the project. Also, a mat foundation is a shallow foundation, and shallow foundations are less expensive than deep foundations.

Section: Building Analysis & Programming

Question 60

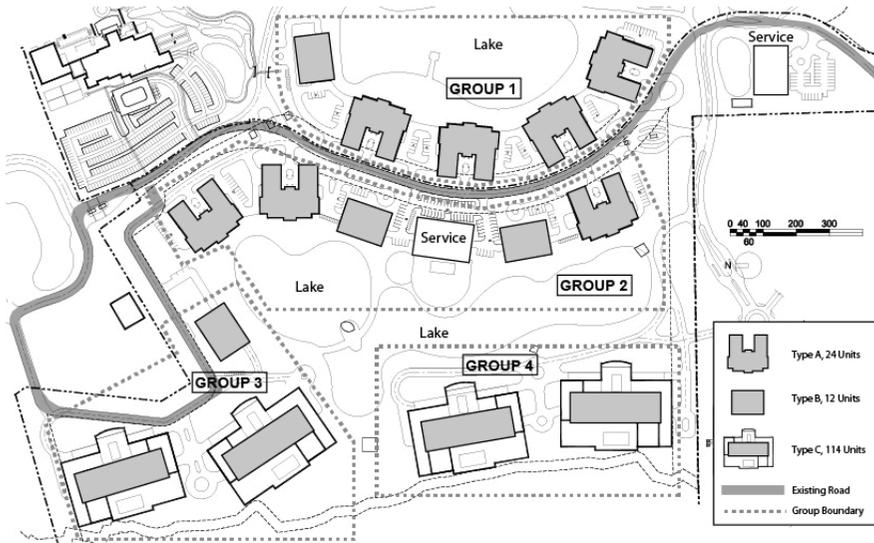

Refer to the exhibit.

An architect is designing a new retirement community campus with multiple buildings. To allow for a phased build-out, the buildings are clustered into four groups. Phase 1 of the build-out has the following requirements:

- Minimum of 100 units.
- Locate all residential buildings on the existing road.
- All residential buildings are to be adjacent to a lake.

Which group is most appropriate for the Phase 1 build-out?

- A. Group 1
- B. Group 2
- C. Group 3
- D. Group 4

Correct answer: A

CORRECT RESPONSE

Group 1


Group 1 has 108 units; all Group 1 residential buildings are located on the existing road; and all Group 1 buildings are adjacent to a lake.

CALCULATIONS

1. Four Type A Buildings at 24 units per building: $4 \times 24 = 96$
2. One Type B Building at 12 units per building: $1 \times 12 = 12$
3. Total number of units: $96 + 12 = 108$ units

Section: Building Analysis & Programming

Question 61

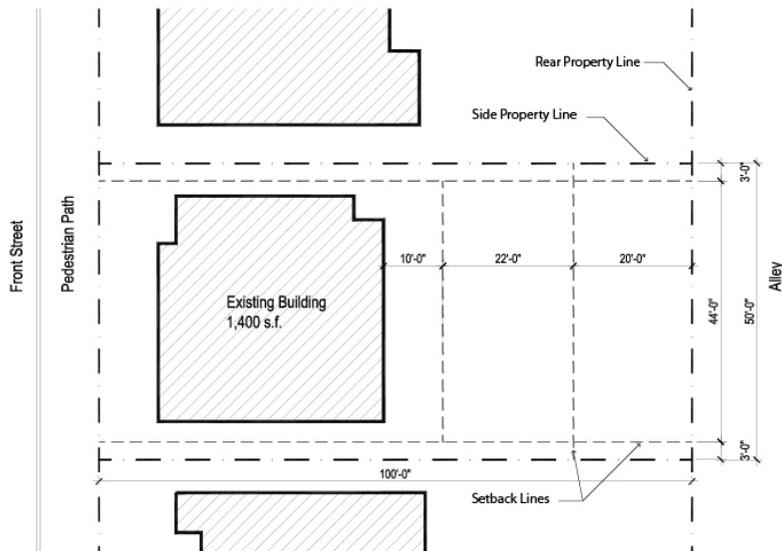

Refer to the exhibit.

A homeowner wants to add a 162-square-foot parking space and a shed in their backyard. The homeowner wants the shed to be as large as possible. The zoning authority has the following requirements for lot improvements:

- The shed must be a minimum of 20' away from the rear property line.
- The shed must be a minimum of 10' away from the main house.
- The maximum area of all buildings on a parcel cannot exceed 40%.
- The maximum impervious surface ratio is 42%.

Which one of the following shed sizes should the architect recommend?

- A. 300 square feet
- B. 480 square feet
- C. 550 square feet
- D. 800 square feet

Correct answer: B

CORRECT RESPONSE

480 square feet

The owner wants the largest shed possible, and in order to find the shed size that the architect should recommend to the owner, it is necessary to calculate both the maximum shed size *and* the maximum impervious surface area. The architect cannot simply recommend the maximum shed size but must recommend the largest shed that can be accommodated on the lot *along with* the parking space (and the existing building area).

CALCULATIONS

1. Lot size: $50' \times 100' = 5,000$ sf
2. Maximum area of all buildings: $5,000$ sf (lot size) \times 40% (maximum building area, per the zoning authority) = $2,000$ sf
3. Maximum shed size: $2,000$ sf - $1,400$ sf (existing building area) = 600 sf
4. Maximum impervious surface area on site: $5,000$ sf \times .42 (maximum impervious surface ratio, per the zoning authority) = $2,100$ sf
5. Allowable impervious surface area on site: $2,100$ sf - $1,400$ sf = 700 sf
6. Impervious surface area for response option B, the 480-square-foot shed: 480 sf (shed area) + 162 sf (parking space area) = 642 sf
7. The 480-square-foot studio shed does not exceed the maximum shed size (480 sf < 600 sf) and the combined area of the shed and parking space does not exceed the allowable impervious surface ratio (642 sf < 700 sf) requirement.

Section: Building Analysis & Programming

Question 62

Due to budget concerns, the city decides to split the regional community center project into two phases. Phase 1 will include the following spaces:

- Entry Lobby: 600 gsf
- Community Health Center: 2,540 nsf
- Administration Suite: 1,620 nsf

The preliminary cost estimate for this project is \$150 per gross square foot.

What is the cost for the Phase 1 development?

- A. \$714,000
- B. \$838,800
- C. \$857,850
- D. \$870,000

Correct answer: C

CORRECT RESPONSE
\$857,850

CALCULATIONS

1. For the gross square footage of the Community Health Center: $2,540 \text{ nsf} \times 1.25$ (25% net-to-gross factor) = 3,175 gsf
2. For the gross square footage of the Administration Suite: $1,620 \text{ nsf} \times 1.2$ (20% net-to-gross factor) = 1,944 gsf
3. For the gross square footage in total: 3,175 (Health Center) + 1,944 (Administration Suite) + 600 (Entry Lobby) = 5,719 gsf
4. For the total cost: $5,719 \text{ gsf} \times \$150 \text{ per gsf} = \$857,850$

CASE STUDY RESOURCES USED

Scenario

Client Space Requirements

Section: Building Analysis & Programming

Question 63

In consultation with an architect, the city has decided the regional community center should be 25,000 square feet and one story. The architect wants to calculate the square footage needed for the Multipurpose Spaces in order to determine how many square feet will remain to devote to the rest of the building program. Supplemental Multipurpose Space requirements from the city follow:

- Conference Center: 30 square feet per person
- Teen Room: 15 square feet per person
- Restroom Set: 1,200 square feet

How much area remains for the rest of the building program?

- A. 6,853 square feet
- B. 9,220 square feet
- C. 11,587 square feet
- D. 15,780 square feet

Correct answer: A

CORRECT RESPONSE
6,853 square feet

CALCULATIONS

1. Determine the net area requirements of each room:
 - Conference Center: $150 \text{ persons} \times 30 \text{ square feet per person} = 4,500 \text{ square feet}$
 - Gymnasium: 7,280 square feet
 - Locker Areas: $500 \text{ square feet} \times 2 = 1,000 \text{ square feet}$
 - Restroom Set: 1,200 square feet
 - Kitchen: 1,500 square feet
 - Teen Room: $20 \text{ persons} \times 15 \text{ square feet per person} = 300 \text{ square feet}$
2. Calculate total net area: $4,500 + 7,280 + 1,000 + 1,200 + 1,500 + 300 = 15,780 \text{ square feet}$
3. Calculate total gross area: $15,780 \text{ square feet} \times 15\% \text{ gross factor (per Client Space Requirements)} = 18,147 \text{ square feet}$
4. Calculate remaining area: $25,000 \text{ square feet} - 18,147 \text{ square feet} = 6,853 \text{ square feet}$

CASE STUDY RESOURCES USED

Scenario

Client Space Requirements

Section: Building Analysis & Programming

Question 64

Due to site constraints, the architect recommends using two stories for the building. The city, though, wants the general public to have easy access to public spaces from the first floor Entry Lobby.

Which program elements should be placed on the second floor? **Check the two that apply.**

- A. Executive Director's Office
- B. Doctor's Office
- C. Locker Rooms
- D. Exam Room
- E. Breakroom
- F. Kitchen

Correct answer: AE

CORRECT RESPONSES

Executive Director's Office

As part of the Administration Suite, it is appropriate to place the Executive Director's Office on the second floor.

Breakroom

As part of the Administration Suite, it is appropriate to place the Breakroom on the second floor.

CASE STUDY RESOURCES USED

Scenario

Client Space Requirements

Section: Building Analysis & Programming

Question 65

The Conference Center was originally programmed as unconcentrated assembly space (15 sf per person), but the city decides to change the programmed use of the space to a classroom for K-12 education classes (20 sf per person). The city wants the classroom to accommodate the same number of people as the originally programmed assembly space.

How much area must be added to the Conference Center space?

- A. 750 square feet
- B. 1,950 square feet
- C. 2,250 square feet

Correct answer: A

CORRECT RESPONSE

750 square feet

Originally, the space calculation was 150 people x 15 sf per person (unconcentrated assembly), but now it is 150 people x 20 sf per person (educational classroom area). The area that must be added to the Conference Center space is therefore the difference between the original square footage needed (2,250 sf) and the new square footage needed (3,000 sf).

CALCULATIONS

1. Square footage needed for the original use (unconcentrated assembly): 150 people x 15 sf per person = 2,250 square feet
2. Square footage needed for the new use (educational classroom area): 150 people x 20 sf per person = 3,000 square feet
3. Difference in square footage: 3,000 - 2,250 = 750 square feet of additional space is needed

CASE STUDY RESOURCES USED

Scenario

Client Space Requirements

Section: Building Analysis & Programming

Question 66

The congregation requests that all interior spaces of the campus be accessible.

At which location should the architect recommend an ADA-compliant ramp be installed to meet this requirement?

- A. Northwest entrance into the Gymnasium from the corridor
- B. North entrance into the Fellowship Hall from the corridor
- C. Corridor connecting the Church and Gymnasium

Correct answer: C

CORRECT RESPONSE

Corridor connecting the Church and Gymnasium

An ADA-compliant ramp will be needed for the corridor connecting the Church and the Gymnasium because, as indicated on the Floor Plan, the Gymnasium is at a lower elevation than the Church and there is no existing ADA accessible connection.

CASE STUDY RESOURCES USED

**Scenario
Plans**

Section: Building Analysis & Programming

Question 67

To meet the growing needs of the congregation, the client has requested that the school include an outdoor play area that will be open to the public. The outdoor play area should have direct sun throughout the morning and be easily accessed from the school.

Where should the outdoor play area be located?

- A. Between the school and Church Street
- B. Between the school parking and gymnasium
- C. Between the school and the Third Street site entrance

Correct answer: C

CORRECT RESPONSE

Between the School and the Third Street site entrance

This location is easily accessible from the school and will receive direct sun throughout the morning hours.

CASE STUDY RESOURCES USED

**Scenario
Plans**

Section: Codes & Regulations

Question 68

The architect of the church expansion is locating the main access drive into the church campus. The city has prohibited new curb cuts.

Which street should provide main access to the church campus?

- A. First Street
- B. Third Street
- C. Church Street

Correct answer: B

CORRECT RESPONSE

Third Street

According to the scenario, access to the site shall be from a road designated as an arterial. Third Street is considered to be a arterial street, and main access can be routed from this street because it has an existing curb cut.

CASE STUDY RESOURCES USED

**Scenario
Plans**

Section: Site Analysis & Programming

Question 69

During a pre-application meeting, the AHJ asks the architect how they plan to address existing water, sewer, and electrical lines that run under the Vacated Street. City records indicate that the lines were installed approximately 60 years ago to serve residences that used to line the street, and the current condition and serviceability of the lines is unknown. The client has asked the architect to recommend the most appropriate way of addressing the abandoned utilities.

What should the architect recommend?

- A. Reuse the existing utility lines and meters for the new buildings.

- B. Leave the existing lines in place and run new lines in a new location.
- C. Remove all existing utilities and replace with new lines in the same location.

Correct answer: B

CORRECT RESPONSE

Leave the existing lines in place and run new lines in a new location.

Being in the center of the site, the existing utility lines will greatly limit where a new structure can be located. The most appropriate solution is to run new lines in a location that will allow for the addition of new buildings to the site. Also, the most economical decision is to leave the existing lines in place rather than remove them.

CASE STUDY RESOURCES USED

**Scenario
Plans**

Section: Site Analysis & Programming

Question 70

For Phase 2 of the project, the university would like to add a food hall with four tenant spaces for food service. A shared kitchen and storage space is required behind the tenant spaces. The university has asked the architect to recommend potential locations based on the following requirements:

- Deliveries will be made by truck twice per day and should not interrupt the classroom spaces.
- Ventilation to the roof will be needed for the new hood and kitchen equipment.
- An existing student work area will be converted to open dining space.
- Impact to the existing classrooms should be minimized but meeting rooms can be relocated.

Where should the architect recommend placing the new food hall?

- A. The break room on the second floor
- B. The mechanical room on the first floor
- C. The shared offices on the first floor

Correct answer: C

CORRECT RESPONSE

The shared offices on the first floor

Placement in the shared offices will offer easy access for deliveries from the outside. Ventilation is possible through the patio above. The meeting rooms adjacent to a student work area can be relocated, per the university's requirements.

CASE STUDY RESOURCES USED

**Scenario
Floor Plans**

Section: Building Analysis & Programming

Question 71

The requirements for the auditorium include the following:

- Will span two floors with sloped seating
- 2,100 square feet with 140 fixed seats
- Accessible entrances on both levels

Which location on the building floor plan is most appropriate for the auditorium?

- A. Between grid line 6 and 8
- B. Between grid line 8 and 10
- C. Between grid line 10 and 12
- D. Between grid line 12 and 14

Correct answer: D

CORRECT RESPONSE

Between grid line 12 and 14

Based on the auditorium requirements, this is the most appropriate location. If the wall starts at grid line 12, it can utilize partially open slab from the removed south stairs. This location would not impact any other areas completed in Phase 1.

CASE STUDY RESOURCES USED

Scenario
Floor Plans

Section: Building Analysis & Programming

Question 72

Using 20 nsf per person, what is the total occupant load for all of the classrooms after Phase 2 is completed?

- A. 267 occupants
- B. 300 occupants
- C. 567 occupants

Correct answer: C

CORRECT RESPONSE
567 occupants

CALCULATIONS

1. 11,340 (total classroom area) / 20 net sf per person = 567 occupants

CASE STUDY RESOURCES USED
Scenario

Section: Codes & Regulations

Question 73

The university has requested that MST Architects design a two-story building with classrooms at each level. To account for the additional vertical circulation, the grossing factor must be increased to 1.75.

What is the new total gross building area?

- A. 5,565 square feet
- B. 5,742 square feet
- C. 6,090 square feet

Correct answer: C

CORRECT RESPONSE
6,090 square feet

CALCULATIONS

1. Calculate net square footage of public restrooms: 2 x 300 nsf = 600 nsf
2. Calculate net square footage of restrooms and classrooms: 600 nsf (restrooms) + 2,880 (classrooms) = 3,480 nsf
3. Calculate gross square footage with new grossing factor: 3,480 nsf x 1.75 = 6,090 gsf

CASE STUDY RESOURCES USED
Scenario
Program Elements

Section: Building Analysis & Programming

Question 74

To maximize the views and minimize the impact on the site, the architect has designed a three-story steel framed building with the observation deck and skywalk connection on the roof level. When the design team gets the soils report, they see that the ground level is sandy and prone to erosion and slippage.

What foundation strategy should the design team pursue?

- A. Drill piles and use a grade level frame
- B. Install a buttressed retaining wall
- C. Utilize concrete belled piers

Correct answer: C

CORRECT RESPONSE
Utilize concrete belled piers

Concrete belled piers are ideal for the steeply sloped site with unstable soil conditions. The piers will extend deep into the site and the belled base allows the load to be spread out at the bottom of the footing, preventing movement in unstable soils.


CASE STUDY RESOURCES USED

Scenario

Program Elements

Section: Site Analysis & Programming

Question 75

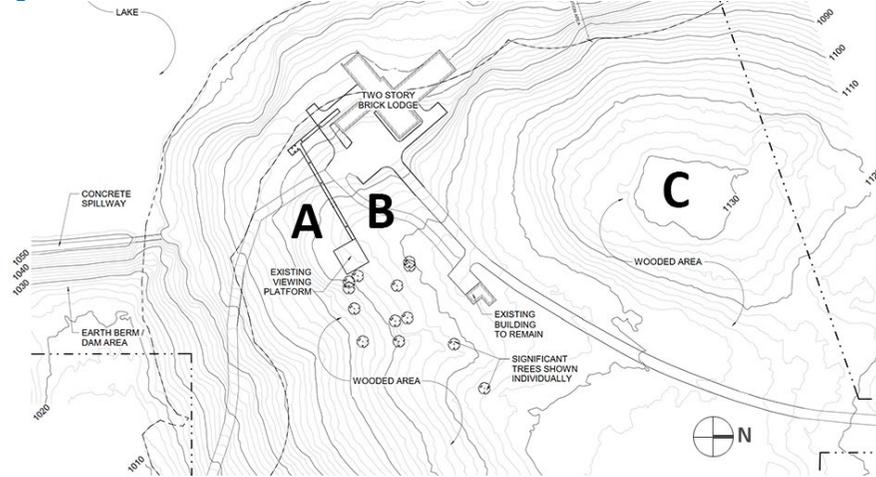

Refer to the exhibit.

The university has identified three locations that they would like to consider for the new academic classroom building location.

Which site should MST Architects recommend as the most appropriate location for the new academic classroom building?

- A. Site A
- B. Site B
- C. Site C

Correct answer: A

CORRECT RESPONSE

Site A

This site offers close proximity to the existing viewing platform with the potential to more easily access the utilities from the lodge and to have direct views to the south for the classrooms.

CASE STUDY RESOURCES USED

Scenario

Program Elements

Section: Site Analysis & Programming

Testing Resources

For more information on test preparation references and resources, as well as testing policies and procedures, please refer to the ARE 5.0 Guidelines, available on ncarb.org.